you can

Canon

PowerShot

DIGITAL IXUS

SELPHY

COMPACT PHOTO PRINTER

Take more than pictures. Take stories.

Take more than pictures. Take stories

Excellence and ease

PowerShot

The perfect camera is one that makes photography a pleasure – whatever your level of experience. With the PowerShot range, you're sure to find a camera that mirrors the way you take photos.

Capture your memories with one-touch shooting, or experiment with full manual control. Enjoy the convenience of slim, pocket-size design, or customise your setup with accessories like flash units and tele-converters.
No matter which model you choose, every PowerShot blends Canon's visionary technology and world-class optics with utterly intuitive design – leaving you free to enjoy the moment.

Bring photos to life

SELPHY

COMPACT PHOTO PRINTER

With a SELPHY Compact Photo Printer you can turn digital photos into beautiful, long-lasting prints in seconds – as well as experimenting with fun effects, layouts and printing formats.

Easy enough for all the family to use, a SELPHY puts your photos where they should be: on display.

Cameras to treasure

DIGITAL IXUS

Experience the thrill of a modern classic. With sleek, tactile designs crafted from a range of high-quality materials, the Digital IXUS range turns heads as easily as it captures memories.

The unique styling of Digital IXUS is complemented by the latest in imaging technology – from processing power for rich, noise-free shots, to intelligent technologies that guide your shots to perfection. With a Digital IXUS, you'll be sure to make an impression – with every shot.

Pioneering technology

Every Canon digital camera features innovative technology and optics refined for over 70 years – to deliver outstanding results every time.*

SMART AUTO

Smart Auto with Scene Detection technology makes taking great pictures easier than ever before. By automatically detecting people and scene conditions, Smart Auto makes sure you always get the best possible photo. People can be shot beautifully – even if they are backlit, moving around or close to the camera. For night shots where the flash is needed, Smart Auto changes settings to ensure background detail is retained. It can even detect if the camera is on a steady surface, such as a tripod, and use a lower ISO to ensure image quality. When shooting on bright days with clear skies, the camera adjusts the blue in the sky for the best possible picture. In bright situations, Smart Auto is able to expand the image's dynamic range to suppress blown highlights whilst retaining detail in shadow areas. On duller days, it can reduce the dynamic range of a scene to increase contrast. Smart Auto's continuous AF is constantly analysing the scene and focusing, so you'll never miss the action.

DIGIC PROCESSING

Canon's DIGIC image processor is the brain inside every Canon digital camera – working with the image sensor to ensure optimum image quality and fast operation, as well as powering intelligent technologies like Face Detection and Motion Detection Technology. DIGIC 4 is Canon's most advanced processor yet, offering near-instant start-up, great detail and low noise (even at high ISOs) and enhanced movie functionality.

LENS KNOW-HOW

The benefits of more than 70 years of lens-making heritage can be seen in every PowerShot and Digital IXUS image. Innovative technologies, such as Canon's UA lens, keep lenses compact and deliver amazing clarity. Pioneering Canon-developed technologies like the optical Image Stabilizer (IS) and Ultrasonic Motor (USM) offer further improvements in image quality and response times. The straight optical path from lens to sensor in all Canon cameras ensures the best possible image capture in every shooting situation. And an extensive range of zooms – covering everything from 28mm wide imaging to 20x telephoto reach – offers the ultimate in flexible, powerful framing possibilities.

PERFECT PORTRAITS

Face Detection Technology identifies the faces in your frame and optimises settings – such as focus, exposure, flash and white balance – for great portrait shots. Face detection can detect small faces as well as faces at an angle or in profile – so you can get a good shot even if your subjects are not looking directly towards the camera. In selected models, Blink Detection warns the user if a subject had their eyes closed in a photo, so you can reshoot. Face Select and Track allows you to choose a particular face as your main subject and track it within the frame – great for shots taken in a crowd. FaceSelf-Timer – which waits until a new face is detected in the frame before triggering the shutter – means no more running to get into group shots and self-portraits.

Without Smart Auto

With Smart Auto

Smart Auto intelligently ensures natural exposure of subject and background



Face Detection Technology

DIGITAL IXUS PowerShot

Image blur can be caused by camera shake or moving subjects

Canon technologies work to freeze the action – for sharper results

Fun doesn't stop when the sun goes down – and with high ISO shooting up to ISO 1600, you don't have to stop either

10.0 MEGA PIXELS CMOS

MEGAPIXEL POWER

The more megapixels you capture, the more flexibility you have with your final images. Creatively crop, supersize photos to poster-size, or enlarge tiny details. The PowerShot SX1 IS takes imaging to the next level with a Canon CMOS sensor – allowing you to capture outstanding 10 Megapixel images with ultra-rapid continuous shooting (at up to 4 frames per second).

Servo AF

SERVO AF

Even if your subject is moving towards or away from the camera, Servo AF lets you keep it in focus. Simply press the shutter button down halfway, and focus is continuously adjusted until the moment you take the shot. Used with Face Detection, great portraits can be taken in more active situations – from the playground to the dance floor.

i Intelligent Contrast Correction

i-CONTRAST

Bringing out the hidden details in your shots is easy with i-Contrast. Powered by DIGIC 4, it works in either shooting or playback mode to brighten dark areas – and thanks to DIGIC 4, the effect looks natural, with minimal noise. Intelligent processing also ensures that lighter areas are not blown out – so it's ideal for backlit subjects and other shots with a lot of shadow.

OPTICAL IMAGE STABILIZER

Motion Detection Technology

BYE BYE TO BLUR

To combat the blurriness that camera shake can cause, most Canon digital compact camera features Canon's optical Image Stabilizer. This uses sophisticated vibration sensors within the lens to automatically detect – and compensate for – camera movement. In many models, this system offers a 4-stop advantage, for continued blur resistance even in lower light conditions. Blur is further guarded against by Canon's Motion Detection Technology. Activated in Smart Auto mode, this uses a combination of technologies – Face Detection, the optical Image Stabilizer, and intelligent assessment of scene changes – to identify subject motion and camera shake. ISO is then optimised for minimum blur and maximum image quality.

ISO 1600

BEAT THE DARK

Thanks to the power of DIGIC processing, Canon digital compact cameras continue to perform exceptionally at high ISO speeds of up to 1600 – giving you the power to capture richly detailed scenes even in low light. This is especially useful in situations where flash is not permitted, or undesirable. For the ultimate in noise reduction and detail at high ISO, choose a model featuring Canon's DIGIC 4 processor.

*Specifications vary between models. Refer to individual specifications for details.

Designed for simplicity

Canon digital compact cameras combine stylish design with ease of use. A wealth of features to help you shoot great photos is packed into their stylish, compact bodies.

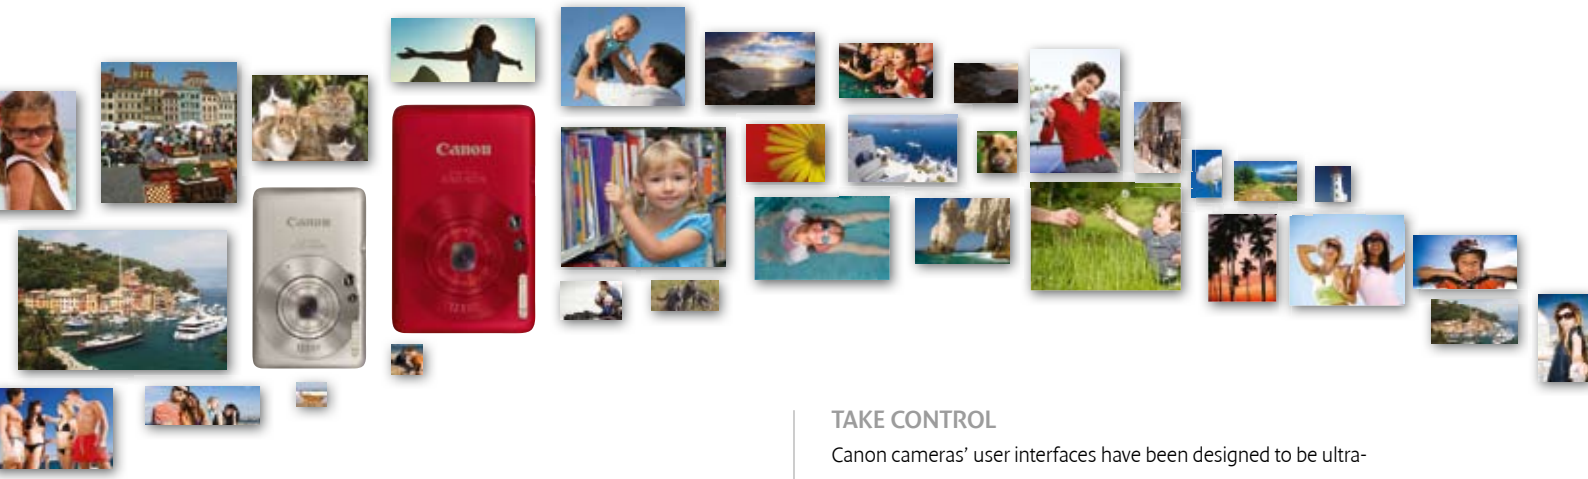

A CLEARER VIEW

3.0" LCD PureColor II

To make shooting and reviewing your pictures easier, Canon cameras incorporate large LCD screens to give you a clearer view of the action. Models featuring PureColor LCD II displays offer incredible colour rendition and contrast even at high viewing angles and they offer greater resistance to fingerprints and scratches keeping your camera looking its best. Antiglare coating helps viewing in sunny conditions. For after-dark shooting, Night Display brightens the LCD, while an optical viewfinder (featured on some models) gives you an alternative way to shoot.

STYLISH DESIGN THAT FITS IN YOUR POCKET

Canon digital cameras combine stylish design with lasting build quality, so you can take them with you with confidence. The elegantly designed sculpted metal bodies of the Digital IXUS range have become a design classic. Remarkably thin at just over 18mm, the Digital IXUS 100 IS is the slimmest Digital IXUS yet, so it slips easily in a pocket or handbag. Whatever your style, the range of colourful PowerShot designs ensure there's a Powershot you'll love. Great design doesn't come at the cost of great features though – the stylish new PowerShot SX200 IS conceals an optically stabilised wide angle 12x zoom inside its compact body.

TAKE CONTROL

Canon cameras' user interfaces have been designed to be ultra-intuitive. The redesigned user interface on selected models feature smoother scrolling menus, better colour gradations and more natural looking fonts to make your camera more enjoyable to use than ever. The Active Display in the Digital IXUS 110 IS and Digital IXUS 990 IS enables you to control playback just by moving or angling the camera – you can move through images quickly with a simple up or down flick of the wrist. And, if there's a function you don't understand on the camera, the new Hints & Tips UI on some models provides a brief explanation of their function – great when the user guide isn't close to hand.

ORGANISE AND SHARE

Smart Auto tags photos automatically during shooting according to the scene detected. In playback, My Category helps you find your images quickly – sorting them into categories like people, scenery and events and allowing you to add or remove tags. Sharing your photos is easy with Image Resize, reducing photo sizes for faster upload, emailing or to save space on your memory card. And with a 100MB of free online space on the Canon Image Gateway website, you can upload images for your friends and family to view or download.

Digital IXUS 100 IS

Modes for every occasion

Take complete control, or let the camera do the work, you decide. Smart Auto with Scene Detection technology gives you better pictures in many situations, whilst special shooting modes make capturing particular scenes easy – from fireworks to snowscapes.*

- AUTO
- EASY
- P PROGRAM
- Av APERTURE PRIORITY
- Tv SHUTTER PRIORITY
- M MANUAL **
- QUICK SHOT
- AQUARIUM
- BEACH
- COLOR ACCENT
- COLOR SWAP
- CREATIVE LIGHT EFFECT
- FIREWORKS
- FOLIAGE
- INDOOR
- ISO 3200
- KIDS AND PETS
- LANDSCAPE
- LONG SHUTTER
- NIGHT SCENE
- NIGHT SNAPSHOT
- PORTRAIT
- SNOW
- SUNSET
- UNDERWATER
- ZOOM BLUR
- SUPER MACRO
- DIGITAL MACRO
- STITCH ASSIST
- MOVIE

EASY MODE

Perfect for beginners, Easy Mode takes complete control of settings to make taking pictures as easy as possible. With Scene Detection Technology, the camera can now identify the best settings for a wide range of different shooting situations. In Easy Mode the LCD monitor is clear of icons to make framing your shot easier and offers limited playback options to avoid accidental errors.

MOVIES IN HIGH DEFINITION

Shoot smooth, natural-looking movie clips with audio. Selected models can now shoot in HD (720p, 30fps). For the ultimate in video quality, the PowerShot SX1 IS lets you shoot stunning, full HD (1080p, 30fps) clips with CD quality stereo sound. Enjoy the results in-camera, on your PC or, using a standard HDMI Mini Connector, on your HDTV for the best possible quality lossless digital playback.

Zoom Blur

CREATIVE EFFECTS

Get creative with two new scene modes on the Digital IXUS 990 IS, Zoom Blur and Creative Light Effect. Zoom Blur moves the lens from wide to telephoto while the shutter is open to create a dramatic zooming effect, giving your images a feeling of speed and exhilaration. Creative Light Effect adds a little magic to your photos. By moving the optical Image Stabilizer unit, Creative Light Effect transforms points of light, such as fairy lights, into tiny stars, hearts or other shapes.

* Available Shooting Modes and Scene Modes vary between models. Refer to individual specifications for details.

**Manual mode capabilities vary between models. Refer to individual specifications for details.

PowerShot

From fun point-and-shoot cameras to sophisticated superzoom models with full creative control – the affordable PowerShot range lets everyone take the pictures they want.

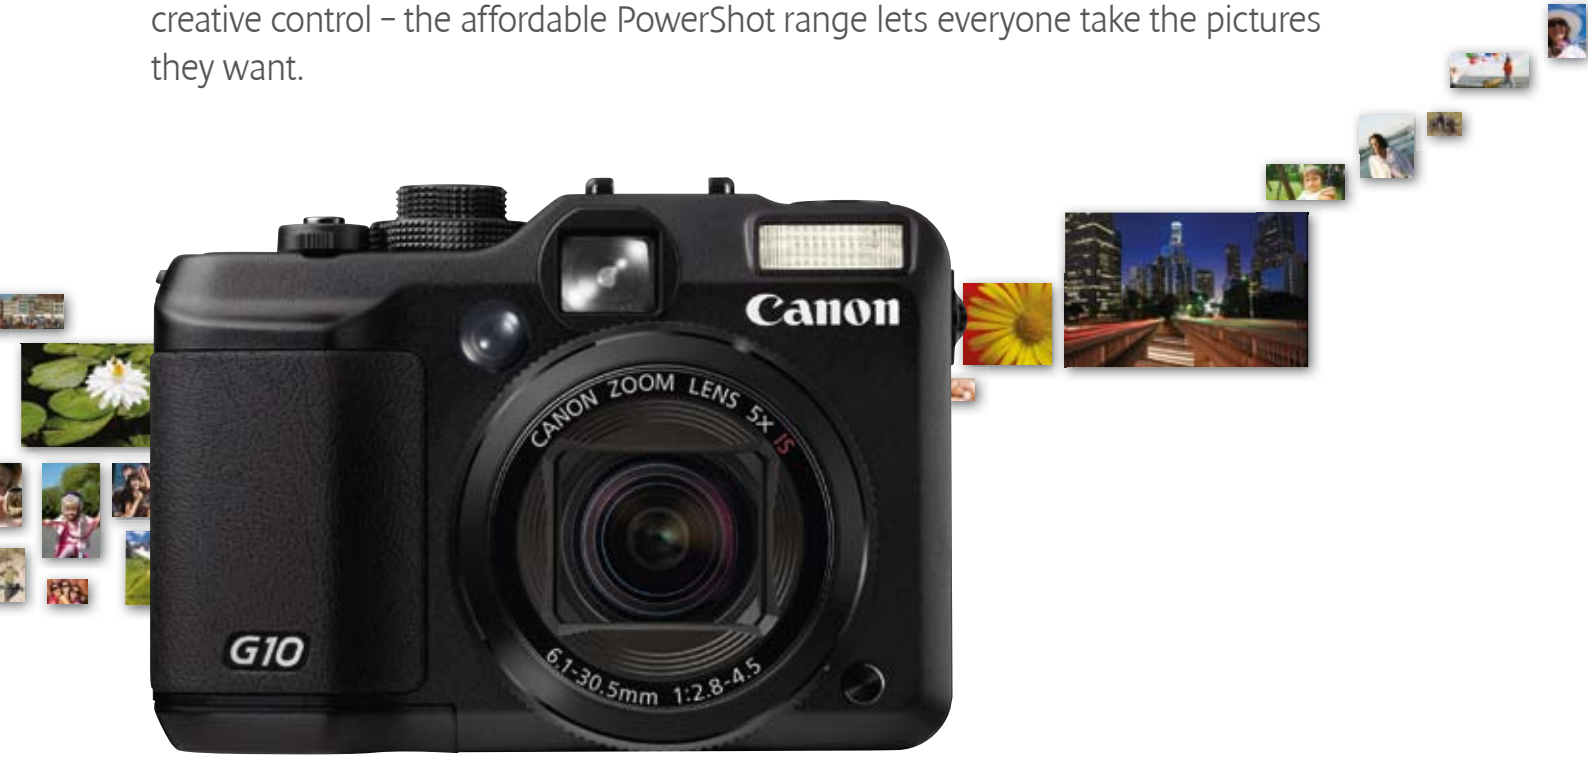

PowerShot G10

The power to excel

With the rich detail provided by a 14.7 Megapixel sensor, the coverage of a 5x wide-angle lens and the ultra-rapid imaging power of Canon's DIGIC 4 processor, the PowerShot G10 pushes every boundary. The inclusion of RAW recording allows total post-shoot image control.

- 14.7 Megapixels
- 5x wide-angle (28mm, f/2.8) lens with optical Image Stabilizer
- RAW image recording plus support for Canon Digital Photo Professional software
- DIGIC 4 for clear, sharp images, high-speed AF (plus Servo AF) and outstanding responsiveness
- Combats blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology
- 3.0" PureColor LCD II plus optical viewfinder
- Dedicated Exposure Compensation and ISO dials
- i-Contrast boosts brightness in dark areas while retaining detail
- 26 shooting modes with manual control and custom settings
- Accessories include tele-converter, Speedlite flashes and waterproof case

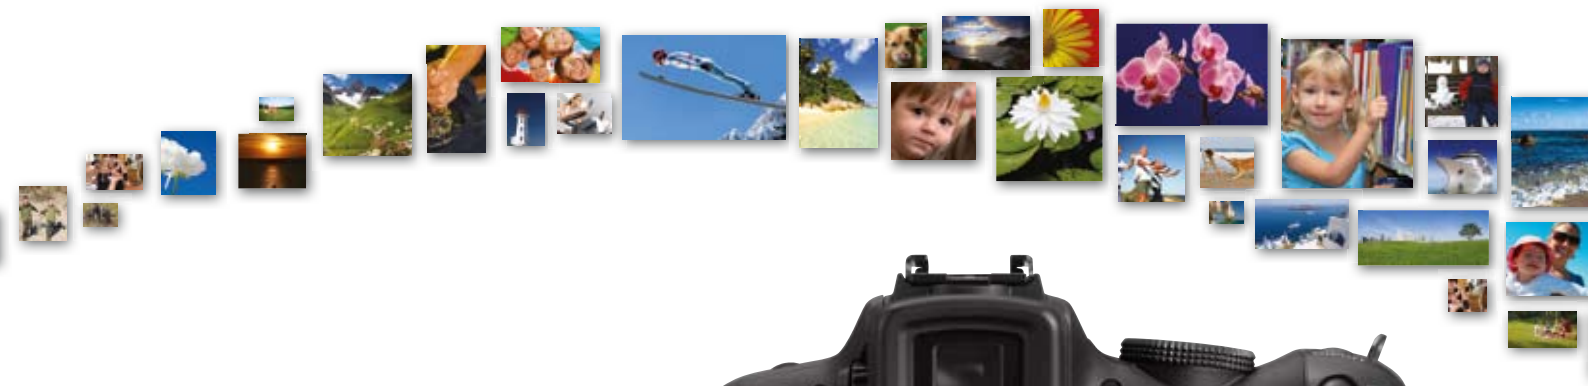

PowerShot SX1 IS

The supercharged super zoom

With a 10.0 Megapixel Canon CMOS sensor, the PowerShot SX1 IS combines exceptional imaging and continuous shooting speeds of up to 4fps. Outstanding reach is provided by a 20x wide-angle zoom, while photos can be supplemented with stunning Full HD video clips.

- 20x wide-angle (28mm, f/2.8) optical zoom with optical Image Stabilizer
- 10.0 Megapixel Canon CMOS sensor
- Full HD (1080, 30fps) movies with stereo CD quality sound – plus HDMI output
- DIGIC 4 for sharp images, fast responsiveness and rapid AF
- Full resolution continuous shooting at 4fps with Servo AF
- RAW recording*
- Face Detection, Face Select & Track and FaceSelf-timer plus Auto Red-Eye Correction
- Combats blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology
- i-Contrast boosts brightness and retains detail in dark areas
- 2.8" widescreen vari-angle LCD
- Modes include full manual control
- Compatible with Canon EX Speedlite flash range

*Firmware download may be required.

PowerShot SX10 IS

Exceptional zoom. Total control

Featuring a 20x wide-angle (28mm) zoom lens, the PowerShot SX10 IS offers exceptional telephoto reach – with image stabilization for ultra sharp results. Canon's DIGIC 4 processor ensures fast, high-quality imaging, while full manual control delivers total creative freedom.

- 20x wide-angle (28mm, f/2.8) optical zoom with optical Image Stabilizer
- 10.0 Megapixels
- DIGIC 4 for sharp images, fast responsiveness and rapid AF
- Face Detection in photos & movies, Face Select & Track and FaceSelf-timer
- Combats blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology and Servo AF
- Shooting modes include full manual control
- 2.5" vari-angle LCD with wide viewing angle, plus electronic viewfinder
- Multi Control Dial and customizable My Menu for fast operation
- i-Contrast boosts brightness and retains detail in dark areas
- 30fps VGA movies with CD quality stereo sound
- Compatible with EX Speedlite flash range

PowerShot SX200 IS

Wide-angle super zoom in your pocket

With a wide-angle 28mm lens and 12x zoom, the compact PowerShot SX200 IS captures landscapes or distant subjects in stunning detail. Other exciting features include Smart Auto mode and HD video shooting.

- 28mm wide-angle lens with 12x optical zoom and 4-stop optical Image Stabilizer
- Compact, 12.1 Megapixel camera with classic styling in three colours*
- DIGIC 4 for clear, sharp images and outstanding responsiveness
- Smart Auto and Easy modes with Scene Detection Technology for great shots more easily
- Combats blur with ISO Auto, Motion Detection Technology, IS and Servo AF
- Face Detection Technology, Blink Detection, FaceSelf-Timer and Auto Red-Eye Correction
- i-Contrast boosts brightness and retains detail in dark areas
- 3.0" high resolution LCD with on screen Hints and Tips
- HD movies (720p, 30fps) plus HDMI connection
- Manual Control mode

*Some colour variations may not be available in some regions.

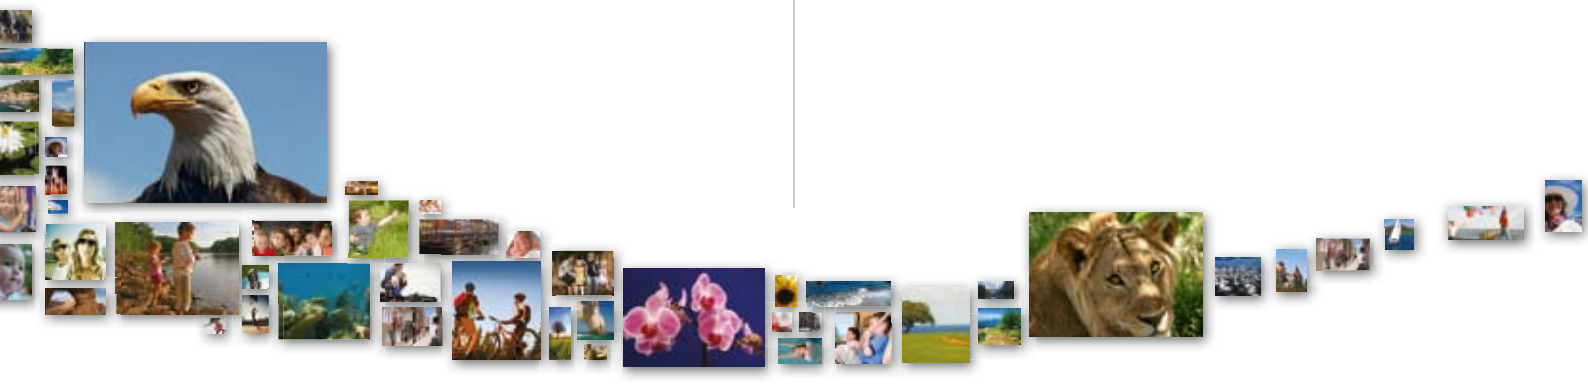

PowerShot SX110 IS

Get closer to your special moments

Whether you're at a school sports day or on safari, the PowerShot SX110 IS brings the action up-close with a 10x Canon optical zoom. Face Detection and anti-blur technologies make great people shots effortless, while a special Easy mode lets all the family get involved.

- High-powered 10x Canon optical zoom with optical Image Stabilizer
- 9.0 Megapixels
- DIGIC III with iSAPS for clear, sharp images and fast response times
- Great people shots with Face Detection AF/AE/FE/WB and Face Select & Track – plus Auto Red-Eye Correction
- Combats image blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology
- Large 3.0" wide-view LCD with Night Display
- 20 shooting modes including Easy mode for point-and-shoot operation
- ISO 1600 for low-light conditions or flash-free indoor shots
- Smooth, 30fps VGA movies with Long Play mode
- Conveniently powered by AA batteries

PowerShot D10

Pictures from the edge

Waterproof and shockproof*, the durable PowerShot D10 brings quality 12.1 Megapixel imaging to active outdoor activities. Keep your hands free and your camera close with a range of great accessories.

- Durable 12.1 Megapixel digital camera
- Waterproof (to 10m), shockproof (up to 1.22m)*, freeze-proof (to -10°C) and dustproof
- 3.0x optical zoom and optical Image Stabilizer
- Smart Auto mode with Scene Detection Technology
- DIGIC 4 for responsive operation, high image quality and improved Noise Reduction
- 2.5" high resolution PureColor LCD II
- Combats blur with ISO Auto, Motion Detection Technology and optical IS
- Great people shots with Face Detection Technology, FaceSelf-Timer, Auto Red-Eye Correction and Blink Detection
- Accessories include Shoulder, Neck and Carabiner Straps**, plus Front Cover Set
- Range of shooting modes and Special Scene Modes including movies

* The shock resistant testing methods are unique to this product and do not guarantee against damage or malfunction of the product.
**Optional straps not designed for underwater use.

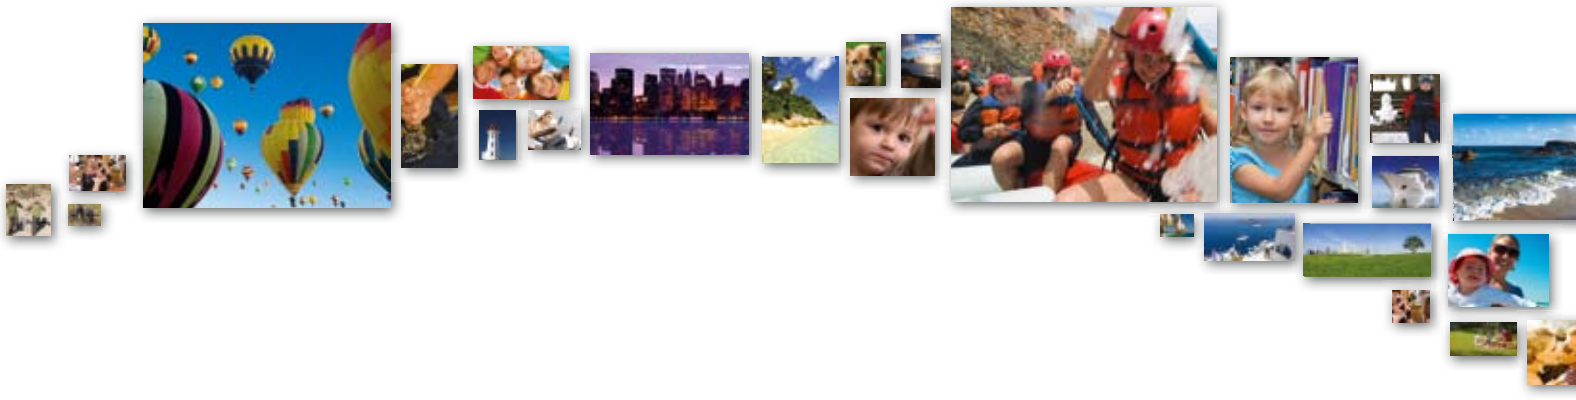

PowerShot E1

Easy, fun, and totally different

Coming in three stylish colours, the 10.0 Megapixel PowerShot E1 delivers fun photo power in a unique, portable package. A host of features – including Face Detection Technology and a user-friendly Easy Mode – let you effortlessly capture every moment.

- Compact, stylish 10.0 Megapixel camera
- Unique, head-turning design in three exciting colours*
- Canon 4x optical zoom with optical Image Stabilizer
- 17 shooting modes including Easy mode
- Great people shots with Face Detection AF/AE/FE/WB and Face Select & Track, plus Auto Red-Eye Correction
- Combats image blur with Optical Image Stabilizer, High ISO Auto, Motion Detection Technology
- DIGIC III with iSAPS for clear, sharp images and fast response times
- 2.5" LCD with wide viewing angle and real-image optical viewfinder
- Smooth, 30fps VGA movies with Long Play mode
- Conveniently powered by AA batteries

*Some colour variations may not be available in some regions.

PowerShot A2100 IS

Zoom power made easy

The PowerShot A2100 IS fits 12.1 Megapixels and a 6x optical zoom into a compact design. Switch to Smart Auto or Easy mode and Canon's Scene Detection Technology lets anyone take a great shot.

- Compact, easy-to-use 12.1 Megapixel camera
- Canon 6x optical zoom with optical Image Stabilizer
- Smart Auto and Easy modes incorporate Scene Detection Technology to optimise settings for any scene
- People shots made easy with Face Detection AF/AE/FE/WB, Face Select & Track, FaceSelf-Timer and Auto Red-Eye Correction
- Large 3.0" high resolution LCD
- Combats blur with optical Image Stabilizer and Motion Detection Technology
- DIGIC 4 processing for fast operation and superb image quality
- i-Contrast boosts brightness and retains detail in dark areas
- Smooth, 30fps VGA movies with Long Play mode
- Wide range of shooting modes include Night Scene & Sunset modes

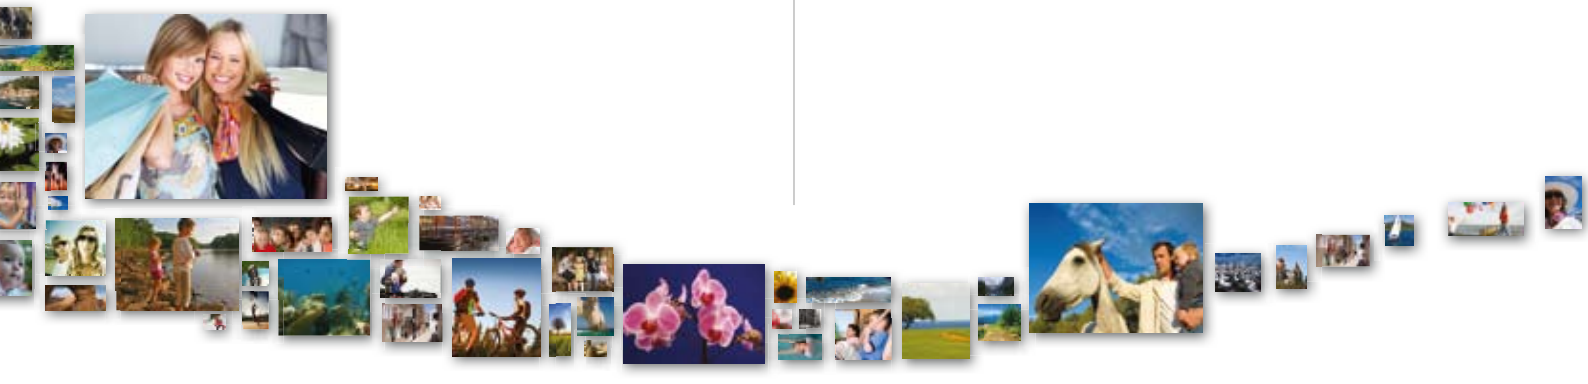

PowerShot A1100 IS

Simply point and shoot for great results

The easy-to-use PowerShot A1100 IS uses Scene Detection, Face Detection and Motion Detection to optimise settings and ensure great results – it's as simple as pointing and shooting.

- 12.1 Megapixel camera in 3 attractive colour variations*
- Canon 4x optical zoom with optical Image Stabilizer
- Exceptional ease of use, with Smart Auto and Easy modes featuring Scene Detection Technology
- DIGIC 4 for fast operation, superb image quality, colour, and advanced noise reduction
- People shots made easy with Auto Red-Eye Correction, Face Detection AF/AE/FE/WB, Face Select & Track and FaceSelf-Timer
- Combats blur with Motion Detection Technology, optical Image Stabilizer and ISO Auto
- i-Contrast boosts brightness in dark areas whilst retaining detail in brighter areas
- 2.5" LCD with OVF
- Smooth 30fps VGA movies with sound and Long Play mode

*Some colour variations may not be available in some regions.

PowerShot A590 IS

Creative photography made easy

The PowerShot A590 IS is the ideal digital camera for you to expand your creativity. Experiment with full manual control and a range of optional lens accessories, while a host of clever Canon technologies and features give your snapshots the edge.

- 8.0 Megapixels
- Canon 4x optical zoom with optical Image Stabilizer (IS)
- Motion Detection Technology, High ISO Auto and IS for the total anti-blur solution
- Enhanced Face Detection Technology with white balance control and Face Select & Track for great people shots
- Red-Eye Correction in shooting and playback
- Fast response times and superb image quality with DIGIC III and iSAPS technology
- Large 2.5" LCD screen and optical viewfinder
- Wide range of shooting modes include full manual control and Easy mode
- 20fps VGA movies with Long Play mode for extended recording
- Optional accessories include wide/tele/close-up lenses and slave flash

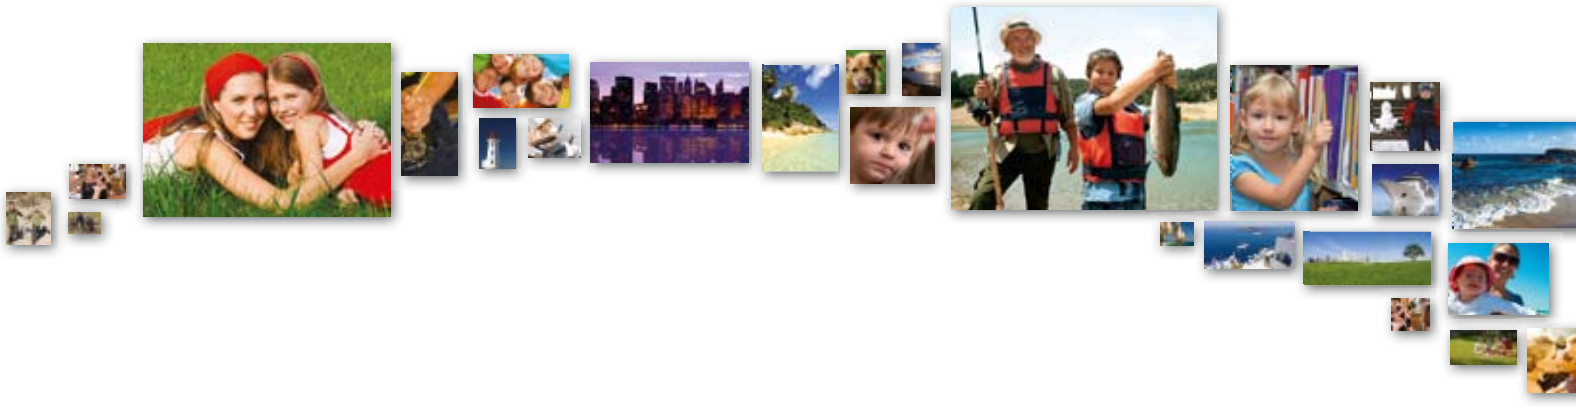

PowerShot A480

Fun, pocket-sized and totally intuitive

Affordable, intuitive and fun, the stylish PowerShot A480 uses Canon know-how to let everyone take great 10 Megapixel photos. Available in four colours, its compact, lightweight design slips easily into any pocket.

- Compact, lightweight 10.0 Megapixel camera in four colour variations*
- Canon 3.3x optical zoom
- Easy to use, with simple button layout and intuitive user interface
- DIGIC III processing delivers high-quality images and intelligent technologies
- 15 shooting modes including 1cm Macro shooting
- People shots made easy with Face Detection AF/AE/FE/WB and Red-Eye Correction in both shooting and playback
- Combats blur with Motion Detection Technology
- Safety FE avoids blow-out when the flash is used
- 2.5" LCD with Image Inspection Tool for focus checking
- Smooth, 30fps VGA movies with Long Play mode

*Some colour variations may not be available in some regions.

PowerShot A470

Point, shoot and share

The PowerShot A470 offers a great value package without compromising on features. Available in four fun colours, it's got everything your family needs to truly capture life's special moments. Simply point and shoot for great results.

- 7.1 Megapixels
- Canon 3.4x optical zoom
- 14 shooting modes including 10 easy-to-use Special Scene modes
- Large 2.5" LCD screen for easy viewing and sharing
- 4 attractive colour options*
- Motion Detection Technology and High ISO Auto anti-blur solution
- Enhanced Face Detection Technology with Face Select & Track and white balance control for great people shots
- Red-Eye Correction in shooting and playback
- Fast response times and superb image quality with DIGIC III and iSAPS technology
- 20fps VGA movies with Long Play mode for extended recording
- Conveniently powered by AA batteries

*Some colour variations may not be available in some regions.

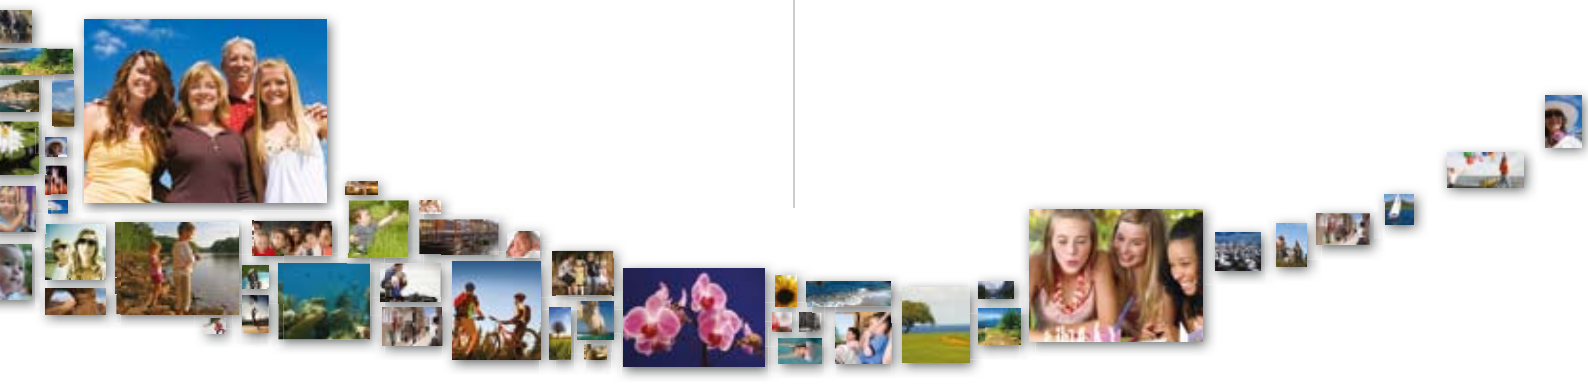

PowerShot

DIGITAL IXUS

SELPHY

COMPACT PHOTO PRINTER

DIGITAL IXUS

Each Digital IXUS combines exquisite, tactile design and metallic finishes with Canon's visionary technologies – for cameras that look as good as the pictures they take.

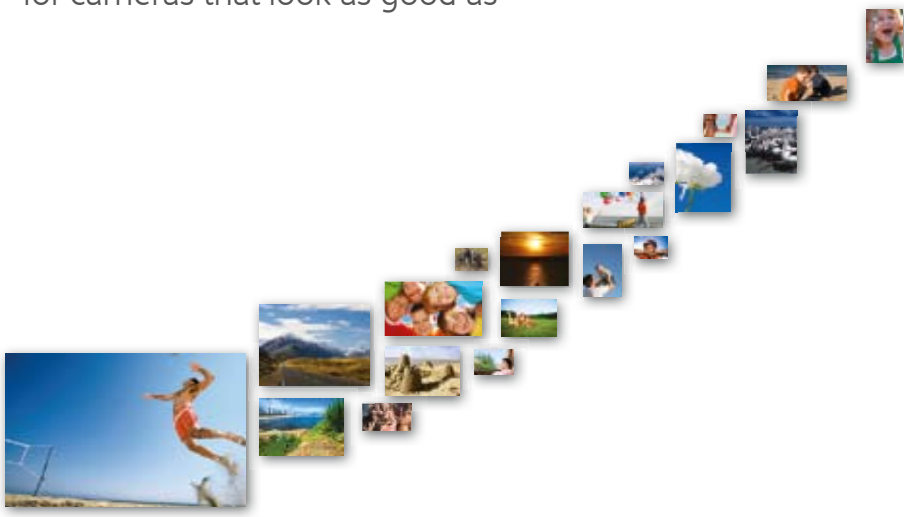

DIGITAL IXUS 980 IS

Exquisite Style. Exceptional Performance

The 14.7 Megapixel Digital IXUS 980 IS blends technical excellence with a unique, stylish black or silver design. Powered by Canon's latest DIGIC 4 processor, it combines advanced auto features – including Face Detection and Motion Detection Technology – with Manual control.

- Eye-catching, stylish 14.7 Megapixel Digital IXUS in black or silver
- 3.7x optical zoom with optical Image Stabilizer
- First IXUS with Manual Control - plus 20 other shooting modes including QuickShot
- DIGIC 4 for superb image quality and fast responsiveness
- Great people shots with Face Detection, Face Select & Track and FaceSelf-timer plus Auto Red-Eye Correction
- Beats blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology and Servo AF
- i-Contrast boosts brightness and retains detail in dark areas
- 2.5" PureColor LCD II with wide viewing angle plus OVF
- Multi Control Dial & customisable My Menu
- High-quality, 30fps VGA movies



DIGITAL IXUS 990 IS

Zoom in on life's finer moments

The elegant Digital IXUS 990 IS features a 5x optical zoom for impressive telephoto reach. Shoot 12 Megapixel stills easily with a range of intelligent technologies, or record breathtaking HD video.

- 12.1 Megapixel camera with elegant metal body and IXUS build quality
- 5.0x optical zoom with optical Image Stabilizer
- Smart Auto mode with Scene Detection Technology
- DIGIC 4 for responsive operation, high image quality and improved Noise Reduction
- Combats blur with ISO Auto, Motion Detection Technology and IS
- Face Detection Technology, FaceSelf-Timer, Auto Red-Eye Correction and Blink Detection
- 3.0" PureColor LCD II with on-screen Hints & Tips and motion-controlled Active Display
- i-Contrast boosts brightness and retains detail in dark areas
- Shooting modes include Zoom Blur and Creative Light Effect
- HD Movies (1280x720, 30fps) with HDMI connection

DIGITAL IXUS 870 IS

See more – in style

With a high-quality build in gold or silver, the 10.0 Megapixel Digital IXUS 870 IS commands attention. Capture panoramic landscapes or whole rooms of friends with a 4x wide-angle zoom – then enjoy images in stunning detail on a 3.0" PureColor LCD II screen.

- Elegant 10.0 Megapixel Digital IXUS in gold or silver
- 4x wide-angle (28mm) optical zoom with optical Image Stabilizer
- DIGIC 4 for clear, sharp images and outstanding responsiveness
- Great people shots with Face Detection, Face Select & Track and FaceSelf-timer plus Auto Red-Eye Correction
- Combats image blur with High ISO Auto, optical Image Stabilizer, Motion Detection Technology and Servo AF
- i-Contrast feature boosts brightness in dark areas while retaining detail
- 3.0" PureColor LCD II with wide viewing angle
- 19 shooting modes including Sunset mode
- Multi Control Dial for fast, easy operation
- High-quality, 30fps VGA movies

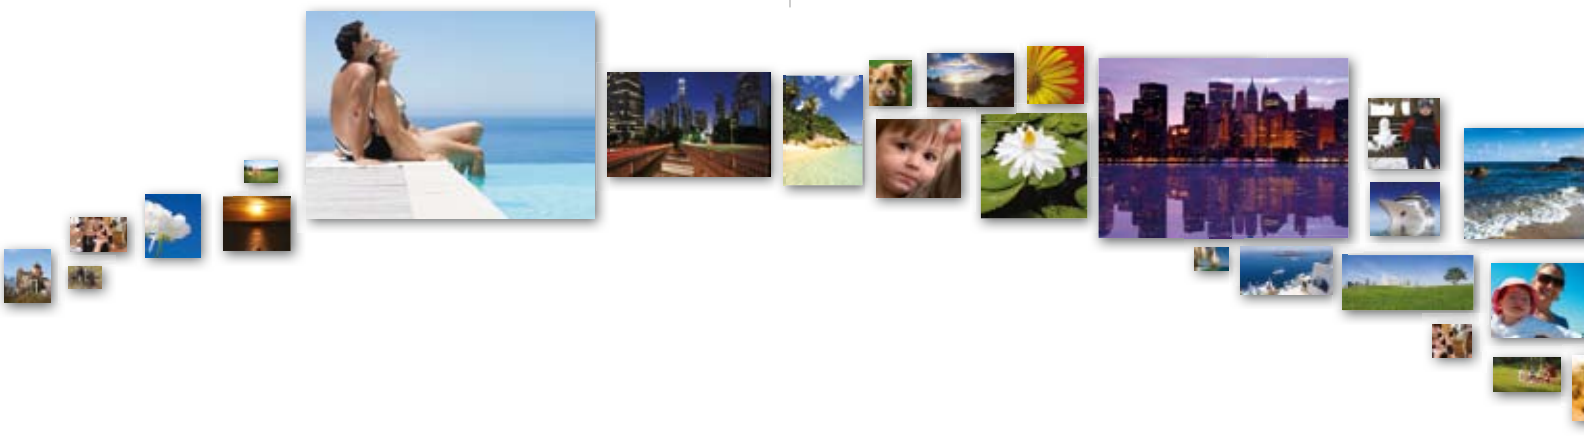

DIGITAL IXUS 110 IS

Broaden your view

Put more in the frame with the 12.1 Megapixel Digital IXUS 110 IS. Combining a wide-angle lens and widescreen 16:9 LCD, it offers a stylish way to shoot beautiful, expansive still images and HD video.

- 12.1 Megapixel camera with distinctive IXUS style, in 4 colour variations*
- 4.0x optical zoom and optical IS
- Designed for widescreen: 28mm wide-angle zoom lens, wide-aspect 2.8" PureColor LCD II, and widescreen HD movies (720p)
- Smart Auto mode with Scene Detection Technology
- DIGIC 4 for responsiveness, high image quality and Noise Reduction
- Combats blur with ISO Auto, Motion Detection Technology and IS
- Face Detection Technology, FaceSelf-Timer, Auto Red-Eye Correction and Blink Detection
- i-Contrast boosts brightness and retains detail in dark areas
- Active Display with motion-activated image review, plus easy User Interface with Hints & Tips
- HDMI connection

*Some colour variations may not be available in some regions

DIGITAL IXUS 100 IS

IXUS design, distilled

The Digital IXUS 100 IS delivers exceptional style in an ultra-slim form. Beautiful photos are made easy by a host of intelligent Canon technologies, and can be supplemented by stunning HD video.

- Exceptionally slim, striking design with metal body in four colour variations*
- 12.1 Megapixels
- 3.0x optical zoom with optical Image Stabilizer
- Smart Auto mode with Scene Detection Technology for effortlessly great shots
- DIGIC 4 for responsive operation, high image quality and improved Noise Reduction Combats blur with ISO Auto, Motion Detection Technology and IS
- Perfect portraits with Face Detection Technology, FaceSelf-Timer, Auto Red-Eye Correction and Blink Detection
- 2.5" PureColor LCD II plus optical viewfinder
- i-Contrast boosts brightness and retains detail in dark areas
- HD Movies (1280x720, 30fps) plus HDMI connection

*Some colour variations may not be available in some regions

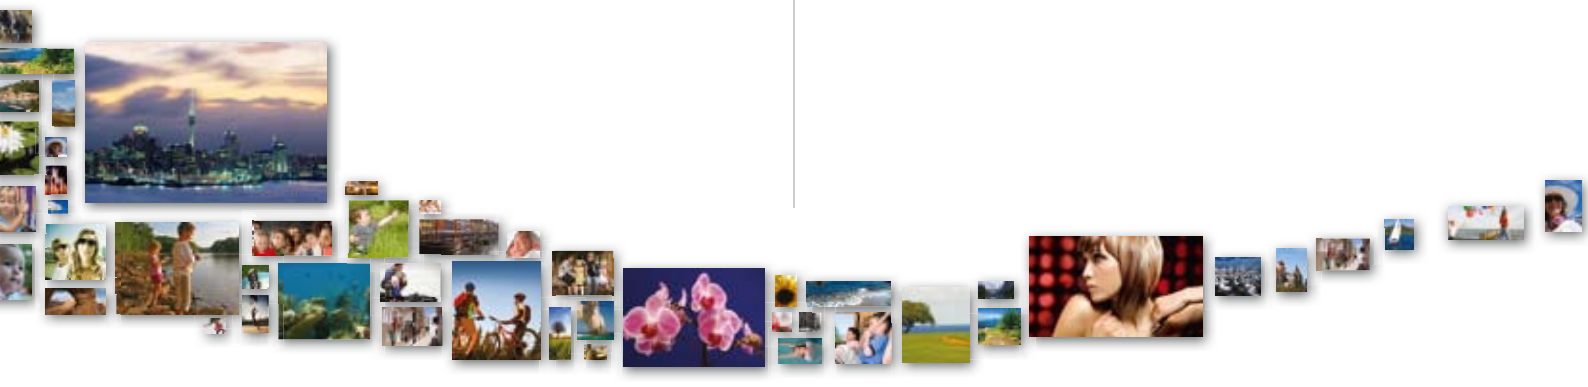

DIGITAL IXUS 85 IS

The purity of IXUS

With its curved square and bold lens ring details, the Digital IXUS 85 IS is a flawless example of traditional IXUS style. 10.0 Megapixels and a 3x optical Image Stabilizer zoom offer advanced image-making, together with a graceful purity of form.

- Exclusive curved square design and Digital IXUS build quality
- 10.0 Megapixels
- Canon 3x optical zoom with optical Image Stabilizer (IS)
- Motion Detection Technology, High ISO Auto and IS for the total anti-blur solution
- Enhanced Face Detection Technology with Face Select & Track and white balance control for great people shots
- Red-Eye Correction in shooting and playback
- Fast response times and superb image quality assured with renowned DIGIC III and iSAPS technology
- 2.5" high resolution PureColor LCD II and optical viewfinder
- Wide range of shooting modes including Sunset scene mode
- 30fps VGA movies with Long Play and Time Lapse movies

DIGITAL IXUS 95 IS

IXUS style. Effortless ease

Uncompromising style and great value are fused in the Digital IXUS 95 IS. Ease of use is assured by Smart Auto mode, which uses Scene Detection to intelligently optimise settings for better pictures.

- Compact and stylish 10 Megapixel IXUS in four colour variations*
- 3.0x optical zoom with optical Image Stabilizer
- Smart Auto mode with Scene Detection Technology for effortless picture taking and great results
- Combats image blur with ISO Auto, Motion Detection Technology and optical Image Stabilizer
- Perfect portraits with Face Detection AF/AE/FE/WB, FaceSelf-Timer and Auto Red-Eye Correction
- DIGIC 4 processing for ultra-fast responsiveness and high image quality
- 2.5" PureColor LCD II
- i-Contrast boosts brightness and retains detail in dark areas
- 17 shooting modes including ISO3200 for great low-light shots
- Smooth, 30fps VGA movies with Long Play mode

*Some colour variations may not be available in some regions.

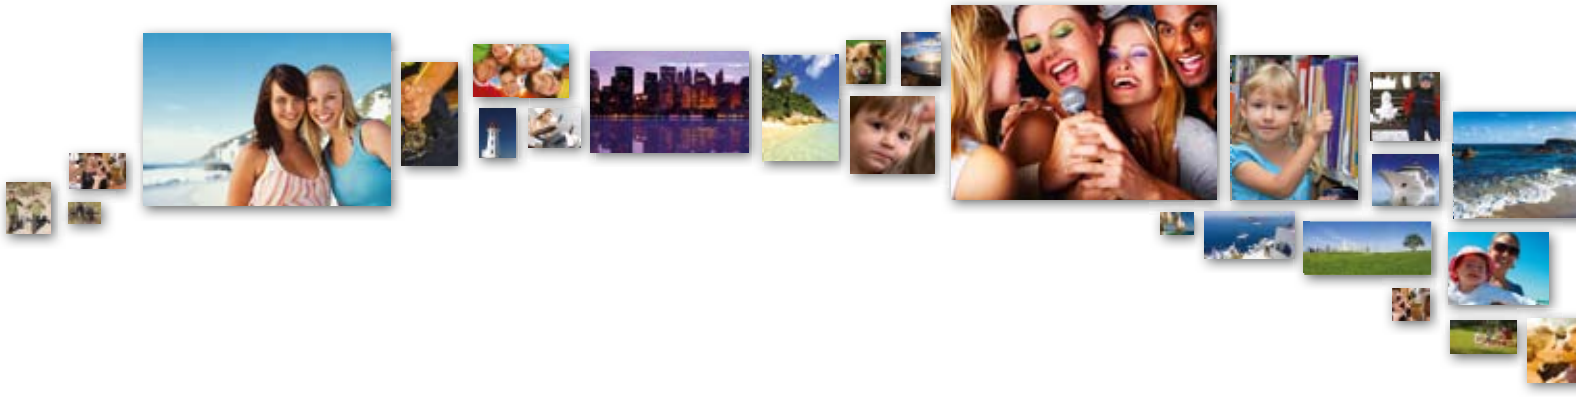

Take photography further

PowerShot

Supercharge your PowerShot with a dedicated range of accessories – designed to maximise photographic possibilities.

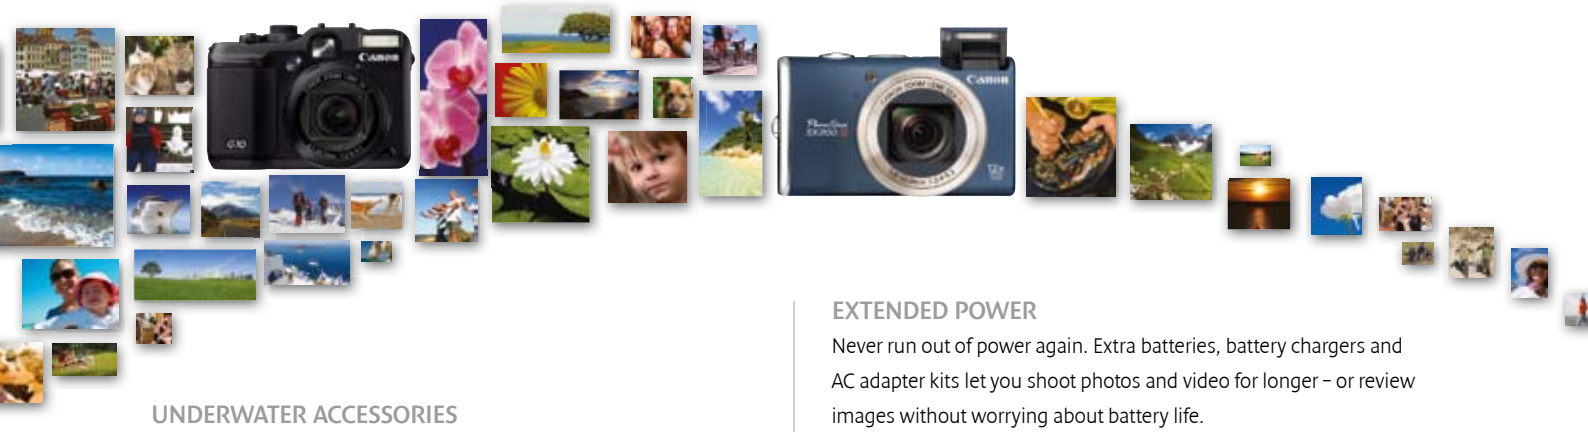

UNDERWATER ACCESSORIES

Carry on shooting almost anywhere. Specially designed waterproof cases[1] and weights open up the world of underwater photography at depths of up to 40 metres – while an Underwater scene mode[1] automatically optimizes camera settings for aquatic environments. Waterproof cases can also be handy on land to protect against snow, sand, dust and excess humidity.

Use a Close-up Lens to fill the frame with dramatic detail.

See the bigger picture with a Wide Converter.[a]

Close in on the action with a Tele Converter.

Close-up Lens 250D (52mm)[b]

Wide Converter 0.7x WC-DC52[b]

Tele Converter 1.75x TC-DC52A[b]

[a] Typical converter range shown.
[b] All lens accessories require a lens adapter. Refer to the compatibility chart for details.

EXTENDED POWER

Never run out of power again. Extra batteries, battery chargers and AC adapter kits let you shoot photos and video for longer – or review images without worrying about battery life.

OUTSTANDING FLASH

Add metres to your flash range, or open the way for creative flash use – the High Power Flash HF-DC1 fires in sync with your camera's built-in flash, and operates wirelessly for maximum flexibility. For the ultimate in Flash power, the hot shoe mount on the PowerShot SX1 IS, PowerShot SX10 IS and PowerShot G10 lets you explore Canon's Speedlite Flash unit range.[2]

DESIGNED FOR ADVENTURE

To protect your camera while you travel, soft cases are available for all of the Powershot range – including a unique neoprene pouch for the PowerShot D10. The PowerShot D10 is a camera designed for people with an active lifestyle. Whether you're a skier or a climber, the optional Shoulder Strap, Neck Strap or Carabiner Strap[3] will help you to keep the camera safe and secure. And, with a range of changeable front covers in three different colour schemes, you can customise your PowerShot D10 to suit your individual style.

[1] Specifications vary between models. Refer to individual specifications for details.
[2] Please refer to accessories chart for details.
[3] Optional straps are not designed for use under water

Accessorise in style

DIGITAL IXUS

Protection from the elements. Extra power. Soft, tactile carry-cases. Give your Digital IXUS the care and attention beauty deserves with a selection of stylish accessories* – specially crafted for the range.

HIT THE BEACH

Don't leave your Digital IXUS behind when you hit the beach or the ski slopes. With a waterproof case, your camera is protected from sand, dust, snow, humidity, and can even follow you into the sea for fun underwater shots at depths of up to 40 metres.

THE SOFT TOUCH

Complete your Digital IXUS with a soft leather case, combined with an elegant leather or metal strap.

EXTRA POWER, EXTRA FLASH

Take your Digital IXUS to the next level. Extra batteries, chargers and AC adaptor kits give you the power to carry on shooting for longer, while the High Power Flash HF-DC1 provides a handy, wireless way to add metres to your flash range – or experiment with creative flash techniques.

*Accessories vary per model. Refer to individual specifications for details.

Accessories

POWERSHOT ACCESSORIES COMPATIBILITY	G10	SX1 IS	SX10 IS	SX200 IS	SX110 IS	D10	E1	A2100 IS	A1100 IS	A590 IS	A480	A470
WATERPROOF CASES												
Waterproof Case WP-DC28 (waterproof to 40m)	●											
Waterproof Case Weight WW-DC1	●											
SOFT CASES												
Soft Case DC60A	●											
Soft Case DC70						●						
Soft Case DCC-80										●		
Soft Case DCC-85								●	●			
Soft Case DCC-450												●
Soft Case DCC-480											●	
Soft Case DCC-650	●											
Soft Case DCC-750					●							
Soft Case DCC-800		●	●									
Soft Case DCC-900							●					
Soft Case DCC-1000				●								
CONVERSION LENSES												
Wide Converter WC-DC52										●		
Tele Converter TC-DC52A										●		
Tele Converter TC-DC58D	●											
Conversion Lens Adapter LA-DC52G										●		
Conversion Lens Adapter LA-DC58K	●											
FLASH												
High Power Flash HF-DC1	●	●	●	●	●	●	●	●	●	●	●	●
Speedlite 580EX, 580EXII, 430EXII, 220EX*	●	●	●									
Speedlite Transmitter ST-E2	●	●	●									
Macro Twin Lite MT-14EX	●											
Macro Ring Lite MR-24EX	●											
Off-Camera Shoe Cord OC-E3	●	●	●									
Bracket BKT-DC1	●											
POWER SUPPLY & BATTERY CHARGERS												
Battery Charger CB-2LXE				●								
Battery Charger CB-2LYE						●						
Battery Charger CB-2LZE	●											
Charger Kit CBK4-300		●	●		●		●	●	●	●	●	●
AC Adapter Kit ACK 800					●		●	●	●	●	●	●
AC Adapter Kit ACK-DC30				●								
AC Adapter Kit ACK-DC40						●						
AC Adapter Kit ACK-DC50	●											
AC Adapter Kit CA-PS700		●	●									
BATTERIES												
Battery Pack NB-7L	●											
Battery Pack NB-6L						●						
Battery Pack NB-5L				●								
Ni-MH Batteries NB4-300		●	●		●		●	●	●	●	●	●
OTHER MISCELLANEOUS												
Front Cover Set FC-DC1						●						
Shoulder+Neckstrap STP-DC1 (not designed for use under water)						●						
Carabiner Strap STP-DC2						●						
Remote Switch RS-60E3	●											
AV Cable AVC-DC400				●		●	●	●	●			
AV Cable AVC-DC300	●				●					●	●	●
AV Cable STV-250N		●	●									
USB Interface Cable IFC-400PCU	●	●	●	●	●	●	●	●	●	●	●	●
HDMI Cable HTC-100		●		●								

*Not all functions supported.

DIGITAL IXUS ACCESSORIES COMPATIBILITY	DIGITAL IXUS 980 IS	DIGITAL IXUS 990 IS	DIGITAL IXUS 870 IS	DIGITAL IXUS 110 IS	DIGITAL IXUS 100 IS	DIGITAL IXUS 85 IS	DIGITAL IXUS 95 IS
WATERPROOF CASES							
Waterproof Case WP-DC23						●	
Waterproof Case WP-DC26			●				
Waterproof Case WP-DC27	●						
Waterproof Case WP-DC29							●
Waterproof Case WP-DC31					●		
Waterproof Case WP-DC32				●			
Waterproof Case Weight WW-DC1	●		●	●	●	●	●
SOFT CASES							
Soft Case DCC-60						●	●
Soft Case DCC-70	●	●					
Soft Case DCC-75			●				
Soft Case DCC-1100				●			
Soft Case DCC-1200					●		
FLASH							
High Power Flash HF-DC1	●	●	●	●	●	●	●
BATTERIES							
Battery Pack NB-4L				●	●		
Battery Pack NB-5L	●	●	●				
Battery Pack NB-6L						●	●
POWER SUPPLY & BATTERY CHARGERS							
Battery Charger CB-2LVE				●	●		
Battery Charger CB-2LXE	●	●	●				
Battery Charger CB-2LYE						●	●
AC Adapter Kit ACK-DC10				●	●		
AC Adapter Kit ACK-DC40						●	●
AC-Adapter Kit ACK-DC30	●	●	●				
OTHER MISCELLANEOUS							
A/V Cable AVC-DC400	●	●	●	●	●	●	●
USB Interface Cable IFC-400PCU	●	●	●	●	●	●	●
HDMI Cable HTC-100		●		●	●		
Digital IXUS Metal or Leather Strap	●	●	●	●	●	●	●

Subject to change without notice.

Perfect Pictures & Easy Sharing

Taking great pictures is only half the story. Easy-to-use software included with Canon digital compact cameras and SELPHY Compact Photo Printers lets you tweak your images and movies to perfection – ready for sharing online at CANON iMAGE GATEWAY.

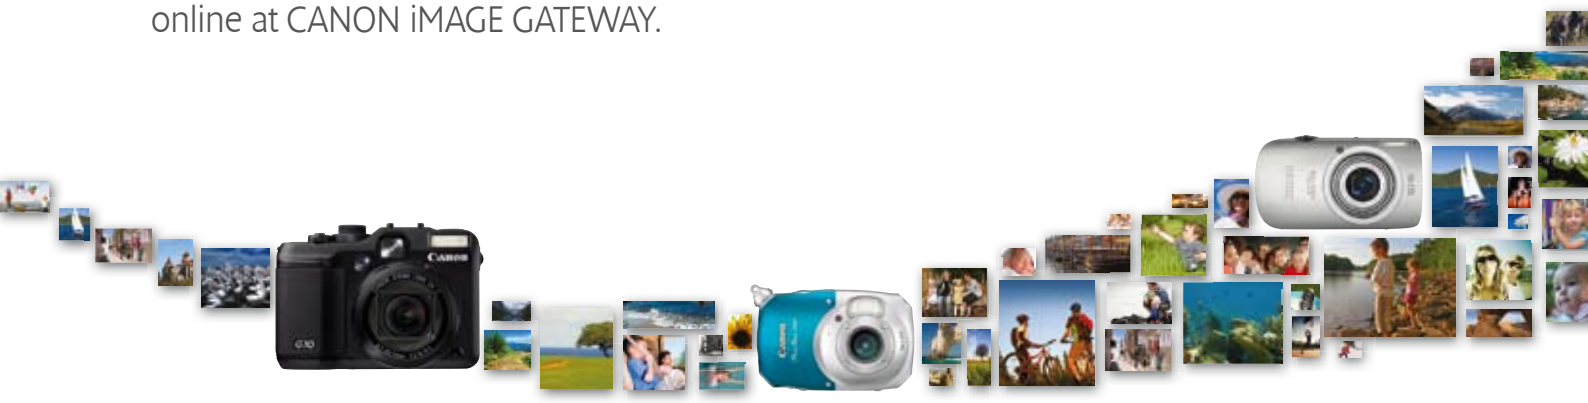

SHARE YOUR PHOTOS AND VIDEOS

Canon compact digital cameras come with access to CANON iMAGE GATEWAY* – an easy-to-use online portal that gives you online space for sharing your shots with friends and family. Just register online via the CD bundled with your camera to obtain your membership. Create themed photo albums with customised layouts and backgrounds. Order photo prints directly from your albums. Get new ideas for fun photo projects, or download add-ons for your Canon digital camera like start-up images and sounds.**

The CANON iMAGE GATEWAY Video Podcast enables you to send your movies to family and friends as a Podcast that can be downloaded via iTunes™ and viewed on the move via an iPod™ or iPhone™ [1]. By subscribing to a CANON iMAGE GATEWAY Video Podcast, your iTunes™ software will be updated every time new Podcasts are uploaded.

You'll also find regular hints and tips articles at the CANON iMAGE GATEWAY website designed specifically for your Canon camera or printer, so you can take your photography in new directions.

ZoomBrowser EX

GET CREATIVE

Carry on creating, even after you've taken your pictures. Each Canon digital camera and SELPHY Compact Photo Printer includes special image management software – ZoomBrowser EX (Windows) or ImageBrowser (Mac) – designed to help you make the most of your images and movies.

Divide your images into groups for easy reference, or get pictures looking their best with retouching and editing tools. You can also share your favourite shots with easy emailing and CANON iMAGE GATEWAY, create slideshows, or make customised photo albums.

Want to play director? A special Movie Edit Task lets even beginners edit their footage into movies, complete with music and visual effects – then save them ready for emailing and sharing on the web.

* Not available in all regions. Visit www.canon-europe.com/cig for a list of supported products

**My Camera function is not supported on all camera models.

[1] iTunes, iPhone and iPod are trademarks of Apple Inc. registered in the U.S. and other countries.

Memories you can hold

SELPHY Great photos deserve to be seen – and what better way to display them than as stunning, lab-quality prints? With Canon's SELPHY Compact Photo Printers, you can make professional-looking prints straight from your digital camera, memory card or mobile phone*. Easy to use, easy to store, a SELPHY is the perfect complement to any digital camera.

*Via IrDA IR (selected models only) or optional Bluetooth adaptor.

Three easy steps to great prints

SELPHY printers have been designed for the ultimate in easy, PC-free operation - with a user-friendly LCD interface, easy-to-replace paper and ink, and ultra-compact designs that can be stored or carried with ease.

CONNECT
your camera directly to the printer.

OR

INSERT
a memory card.

1

2 SELECT
the image you want.

3 PRINT
your photo in a variety of sizes and formats.

To make direct printing even easier, selected models have a Print button that illuminates when ready and prints the selected image when pressed.

STATE OF THE ART

As well as delivering quick scrolling, image viewing, and start-up times, Canon's DIGIC II processor – used in SELPHY ES Compact Photo Printers – provides advanced in-printer processing of every image. So no matter what camera you use, you always get the best image possible.

PHOTOS THAT LAST A LIFETIME

SELPHY prints are given an authentic 'photo lab feel' by dye-sublimation technology, which produces high-quality, fade-resistant results. Every photo is finished with a high-gloss protective layer, which protects against splashes and sticky fingers – as well as keeping your photos bright, rich and vivid for up to 100 years.*

Internal Memory Printed a photo that you know will be in demand? The SELPHY ES3 includes 1GB of built-in memory – so you can store your best shots, complete with any designs you've added, ready for printing on request.

MAKE GREAT PHOTOS EVEN BETTER

Image Optimize My Colors Red-eye Correction

Bring out the best in your photos with a series of user-friendly edits and enhancements.** Image Optimization automatically adjusts qualities like brightness and contrast. My Colors offers a whole range of colour effects, like sepia and Black and White, while Red-Eye Correction keeps eyes looking natural.

GET CREATIVE

Creative Print

SELPHY ES printers include a special Creative Print button, which lets you brighten photos up with speech bubbles, frames and clip art – or incorporate your favourite shots into calendars and Multi Layout prints. Plus, with special Gold and Silver Easy Photo Packs for ES printers, you can bring out the sparkle in subjects – or add glittering decorations to your prints.

*See specifications for details.

**Options may vary per model or connection

Easy Photo Pack insertion

SELPHY ES3

Create, keep and share every memory

Compact, stylish and featuring a host of creative options, the SELPHY ES3 delivers lab-quality photos straight from your memory card or digital camera. Built-in memory lets you store your favourite images, ready for printing wherever and whenever the mood takes you.

- Unique “Easy Photo Pack” integrates ink and media for simple operation and protection from dust
- Add sparkle to prints with special gold and silver Easy Photo Packs
- Compact, vertical design with handle, Easy Scroll Wheel and 3.5” colour LCD
- Built-in memory for storing favourite images*
- DIGIC II processor for fast, lab-quality printing
- Print from memory card, digital cameras or camcorders*
- IrDA IR and optional Bluetooth adaptor for printing from wireless devices
- Built-in image optimisation (Auto Image Correction, Red-Eye Correction, Image Trim, My Colors)
- Creative Print button – add frames, filter effects and more
- 100 year* prints

*See specifications for details

Easy Scroll Wheel

SELPHY ES30

Your photos in your hand – in seconds

With its stylish vertical design and easy operation, the SELPHY ES30 puts the fun into printing lab-quality photos. Optimise your pictures with the onboard retouching tools, add clipart and frames, or simply enjoy one-touch, computer-free printing.

- Unique “Easy Photo Pack” integrates ink and media for simple operation and protection from dust
- Add sparkle to prints with special gold and silver Easy Photo Packs
- Compact, vertical design with carry handle
- Easy to use with 3.0” colour LCD and Easy Scroll Wheel
- DIGIC II processor for fast, lab-quality printing
- Print direct from memory cards, digital cameras and camcorders*
- Optional Bluetooth adaptor for printing from wireless devices
- Onboard image optimisation (Auto Image Correction, Red-Eye Correction, Image Trim, My Colors)
- Creative Print button - create calendars, frames, multi-layouts and more
- Long-lasting 100 year* prints

*See specifications for details

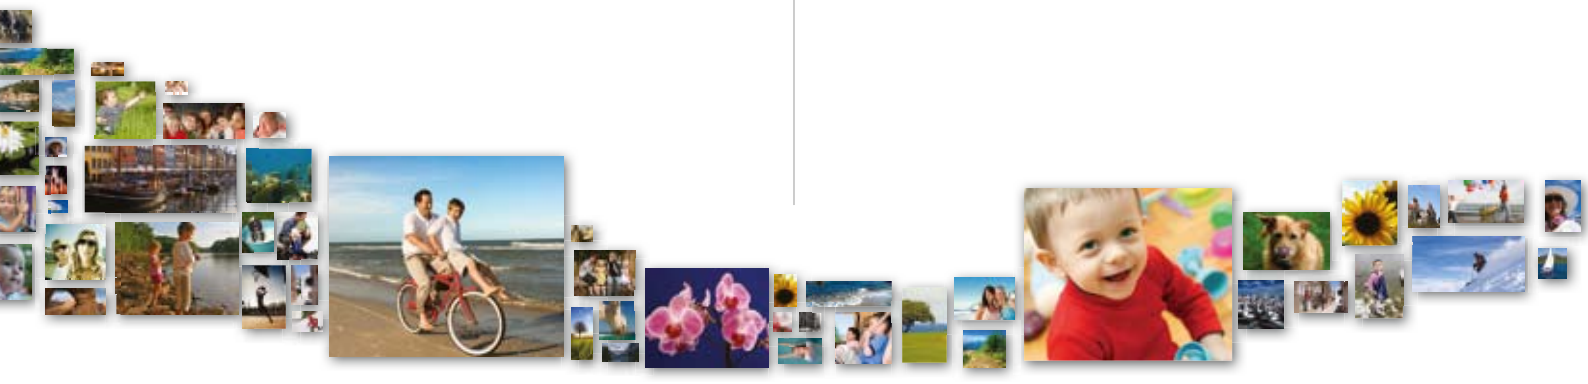

Easy memory card insertion

SELPHY CP760

Affordable, easy photo printing

Ultra-compact and incredibly easy to use, the SELPHY CP760 prints straight from your memory card, digital camera or computer – producing beautiful, high quality prints in a wide range of sizes.

- Ultra-compact affordable photo printer
- Easy, family-friendly operation
- Direct printing from most digital cameras*
- Print direct from most memory cards and from portable devices with optional Bluetooth adaptor*
- Large, angled 2.5" colour LCD for image preview and selection
- Bright, natural-looking faces with automatic image optimisation
- Automatic Red-Eye Correction
- Instantly dry coating protects prints from splashes and finger marks
- Wide range of print options including credit card and sticker sizes
- Long-lasting 100 year prints*

*See specifications for details

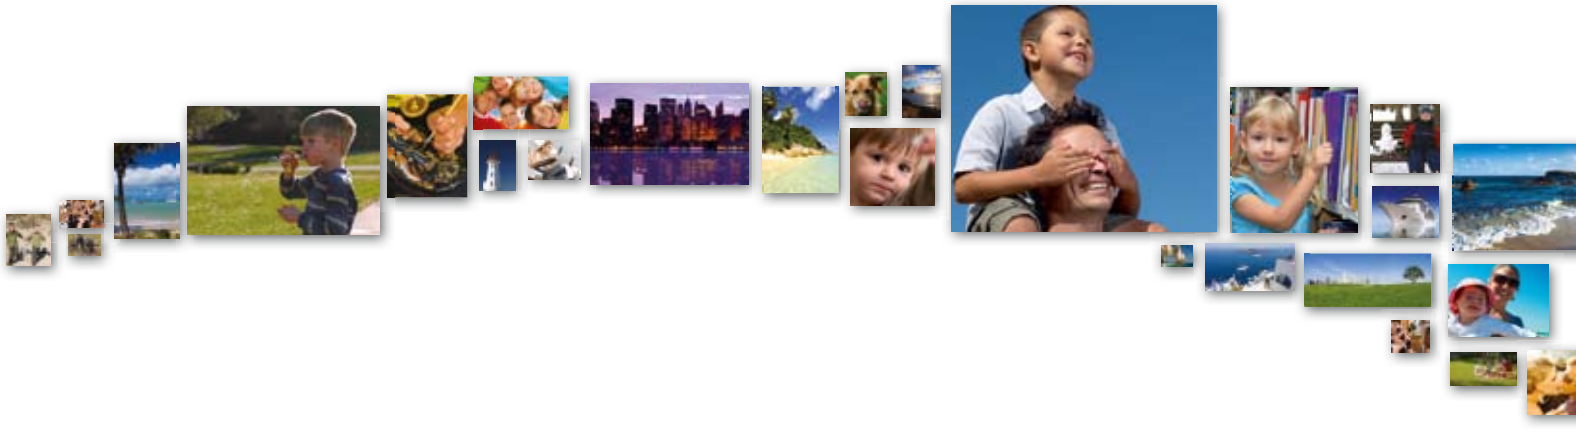

Free your photos

Get spontaneous snaps off your phone and into your hand. You can beam photos from mobile phones or PDAs in two different ways.

Bluetooth® Simply insert the optional BU-30 Bluetooth adaptor and you can send photos to your SELPHY Compact Photo Printer from any Bluetooth-enabled mobile phone or PDA.

INFRARED

The SELPHY ES3 features built-in IrDA IR connectivity, providing another easy way to print from mobile devices.

SELPHY & YOUR COMPUTER

Though designed for direct printing from devices, you can also use your SELPHY Compact Photo Printer to print great-looking photos from a PC or Mac. All models come with ZoomBrowser EX and ImageBrowser EX software, which includes easy organisation and image correction features. Photo Express LE software lets you add fun frames and text to your photos before printing. Other software supplied with the SELPHY ES3 includes SELPHY Contents Utility, which allows users to add extra frames or clip art to the printer's internal memory. Every SELPHY also includes membership of CANON iMAGE GATEWAY*, Canon's online image sharing service. For more information, see page 24.

*Not available in all regions.

Choose your format

From classic postcard size papers to miniature stickers, SELPHY Compact Photo Printers offer you a wide range of ways to print your photos. All paper comes packaged with just the right amount of ink – so you always replace both in one convenient step.

EASY PHOTO PACK FOR USE WITH SELPHY ES3 AND SELPHY ES30

E-P50/E-P100
Ink Paper Set
Postcard Size
(50 or 100 sheets)

E-L50/E-L100
Ink Paper Set
L Size
(50 or 100 sheets)

E-P25BW
Ink Paper Set
B/W Postcard Size,
(25 sheets)

E-C25
Ink Paper Set
Credit Card Size
(25 sheets)

E-C25L
Ink Paper Set
Credit Card Size
Stickers
(25 sheets)

E-P20G
Ink Paper Set
Gold
(20 sheets)

E-P20S
Ink Paper Set
Silver
(20 sheets)

INK AND PAPER SETS FOR USE WITH SELPHY CP760

KP-36IP
Ink Paper Set
Postcard Size
(36 sheets)

KP-72IN/108IN
Ink Paper Set
Postcard Size
(72 or 108 sheets)

KL-36IP
Ink Paper Set
L Size (36 sheets)

KC-36IP
Ink Paper Set
Credit Card Size
(36 sheets)

KC-18IF
Ink Paper Set
Credit Card Size
Stickers
(18 sheets)

KC-18IL
Ink Paper Set
Mini Stickers
(18 sheets)

KW-24IP
Ink Paper Set
Wide Size
(24 sheets)

Borderless Postcard Print

ID Photo Print

Mini Stickers

	PowerShot G10	PowerShot SX1 IS	PowerShot SX10 IS
IMAGE SENSOR			
Type	1/1.7" CCD	1/2.3" Canon CMOS	1/2.3" CCD
Effective Pixels	Approx.14.7M	Approx.10.0M	Approx.10.0M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR			
Type	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology
LENS			
Focal Length	6.1 - 30.5 mm (35mm equivalent: 28-140mm)	5.0 - 100.0 mm (35mm equivalent: 28-560mm (4:3 aspect ratio) / 29-580mm (16:9 aspect ratio))	5.0 - 100.0 mm (35mm equivalent: 28-560mm)
Zoom	Optical 5x. Digital approx. 4x (with Digital Tele-Converter approx. 1.7x or 2. 2x and Safety Zoom[1])[2]. Combined approx. 20x	Optical 20x. Digital approx. 4x (with Digital Tele-Converter approx. 1.4x or 2. 3x and Safety Zoom[1])[2]. Combined approx. 80x	Optical 20x. Digital approx. 4x (with Digital Tele-Converter approx. 1.4x or 2.3x and Safety Zoom[1])[2]. Combined approx. 80x
Maximum f/number	f/2.8-f/4.5	f/2.8-f/5.7	f/2.8-f/5.7
Construction	11 elements in 9 groups (1 double-sided aspherical element)	13 elements in 11 groups (1 UD and 1 single-sided aspherical element)	13 elements in 11 groups (1 UD and 1 single-sided aspherical element)
Image Stabilisation	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)
Ultrasonic Motor (USM)	-	Yes, zoom	Yes, zoom
FOCUSING			
Type	TTL	TTL	TTL
AF System/Points	AiAF (Face Detection / 9-point), 1-point AF (Any position is available, fixed centre or Face Select and Track)	Face Detection, 1-point AF (Any position is available, fixed to centre or Face Select and Track)	Face Detection, 1-point AF (Any position is available, fixed to centre or Face Select and Track)
AF Modes	Single, Continuous, Servo AF[10]	Single, Continuous, Servo AF[10]	Single, Continuous, Servo AF[10]
AF Point Selection	Manual selection using FlexiZone AF/AE, Size (Normal, Small)	Manual selection using FlexiZone AF/AE, Size (Normal, Small)	Manual selection using FlexiZone AF/AE, Size (Normal, Small)
AF Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
AF Assist Beam	YES	YES	YES
Manual Focus	YES	YES	YES
Focus Bracketing	YES	YES	YES
Closest Focusing Distance	1cm (W) from front of lens in macro	0cm (W) from front of lens in Super Macro	0cm (W) from front of lens in Super Macro
EXPOSURE CONTROL			
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre or linked to Face Detection AF or FlexiZone AF frame)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre or linked to Face Detection AF or FlexiZone AF frame)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre or linked to Face Detection AF or FlexiZone AF frame)
AE Lock	YES	YES	YES
Exposure Compensation	+/- 2 EV in 1/3 stop increments i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction
AEB	1/3 - 2 EV in 1/3 stop increments	1/3 - 2 EV in 1/3 stop increments	1/3 - 2 EV in 1/3 stop increments
ISO sensitivity[3]	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600
SHUTTER			
Speed	1/60 - 1/4000 sec (factory default), 15 - 1/4000 sec (total range - varies by shooting mode)	1/8 - 1/3200 sec (factory default), 15 - 1/3200 sec (total range - varies by shooting mode)	1/8 - 1/3200 sec (factory default) 15 - 1/3200 sec (total range - varies by shooting mode)
WHITE BALANCE			
Type	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Flash, Underwater, Custom1, Custom2	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Flash, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Flash, Custom
COLOUR MATRIX			
Type	sRGB	-	-
VIEWFINDER			
Viewfinder	Real-image zoom, optical viewfinder	EVF (0.40" type), aspect ratio 16:9, approx. 148,000 dots	EVF (0.44" type), approx. 235,000 dots
Dioptre Correction	YES	YES	YES
LCD MONITOR			
Monitor	3.0" PureColor LCD II (TFT), approx. 461,000 dots	Vari-angle 2.8" TFT, aspect ratio 16:9, approx. 230,000 dots	Vari-angle 2.5" TFT, approx. 230,000 dots
Coverage	100%	100%	100%
Brightness	Adjustable to one of fifteen levels	Adjustable to one of two levels	Adjustable to one of two levels
FLASH			
Modes	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off
Slow Sync Speed	YES	YES	YES
Red-Eye Reduction	YES	YES	YES
Flash Exposure Compensation	+/- 2 EV in 1/3 stop increments. Face Detection FE. Safety FE	+/- 2 EV in 1/3 stop increments. Face Detection FE. Safety FE	+/- 2 EV in 1/3 stop increments Face Detection FE. Safety FE
Flash Exposure Lock	YES	YES	YES
Manual Power Adjustment	3 levels with internal flash (up to 22 levels with external EX Speedlites)[4]	3 levels with internal flash (up to 19 levels with external EX Speedlites 220EX and 430EX II. 22 levels with 580EX II)[4]	3 levels with internal flash (up to 19 levels with external EX Speedlites 220EX and 430EX II. 22 levels with 580EX II)[4]
Second Curtain Synchronisation	YES	YES	YES
Built-in Flash Range	30cm-4.6m (W) / 2.8m (T)	50cm-4.8m (W) / 1.0m-2.6m (T)	50cm-5.2m (W) / 1.0m-2.8m (T)
External Flash	E-TTL with EX series Speedlites[4], Macro Twin Lite MT-14EX, Macro Ring Lite MR-24EX, Canon High Power Flash HF-DC1	E-TTL with EX series Speedlites[4], Canon High Power Flash HF-DC1	E-TTL with EX series Speedlites[4], Canon High Power Flash HF-DC1
SHOOTING			
Modes	Auto, Program AE, Shutter priority AE, Aperture priority AE, Manual, Custom (2 modes), Stitch Assist, Movie, Special, Scene (Portrait, Landscape, Night Scene, Sports, Night, Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater, ISO 3200[5], Color Accent, Color Swap)	Auto, Program AE, Shutter priority AE, Aperture priority AE, Manual, Custom, Portrait, Landscape, Night Snapshot, Sports, Stitch Assist, Movie, Special Scene (Indoor, Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Long Shutter, Aquarium, ISO 3200[5], Color Accent, Color Swap), Super Macro	Auto, Program AE, Shutter priority AE, Aperture priority AE, Manual, Custom, Portrait, Landscape, Night Snapshot, Sports, Stitch Assist, Movie, Special Scene (Indoor, Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, ISO 3200[5], Color Accent, Color Swap), Super Macro
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)
Drive modes	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer
Continuous Shooting	Approx. 1.3x shots/sec.[6], AF: Approx. 0.7 shots/sec.[6], LV: Approx. 0.7 shots/sec.[6] (until memory card becomes full)[7]	Approx. 4.0 shots/sec.[6], AF: Approx. 1.1 shots/sec.[6], LV: Approx. 1.2 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.4 shots/sec.[6], AF: Approx. 0.7 shots/sec.[6], LV: Approx. 0.8 shots/sec.[6] (until memory card becomes full)[7]
RECORDING PIXELS/COMPRESSION			
Image Size	(L) 4416 x 3312, (M1) 3456 x 2592, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4416 x 2480. Resize in playback (M3, S, 320 x 240)	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3) 1600 x 1200, (S) 640 x 480, (LW) 3640 x 2160, (SW) 1920 x 1080. Resize in playback (M3, S, 320 x 240. LW to SW)	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3) 1600 x 1200, (S) 640 x 480, (W) 3648 x 2048. Resize in playback (M3, S, 320 x 240)
Compression	Superfine, Fine, Normal	Superfine, Fine, Normal	Superfine, Fine, Normal
Movies	640 x 480, 30fps, 320 x 240, 30fps	(HD) 1920 x 1080, 30fps (1080p), (L)640 x 480, 30fps, (M)320 x 240, 30fps	640 x 480, 30fps, 320 x 240, 30fps
Movie Length	Up to 4GB or 1 hour[7]	(HD) Up to 4GB or 29 min. 59 sec.[11], (L and M) Up to 4GB or 1 hour[7]	Up to 4GB or 1 hour[7]

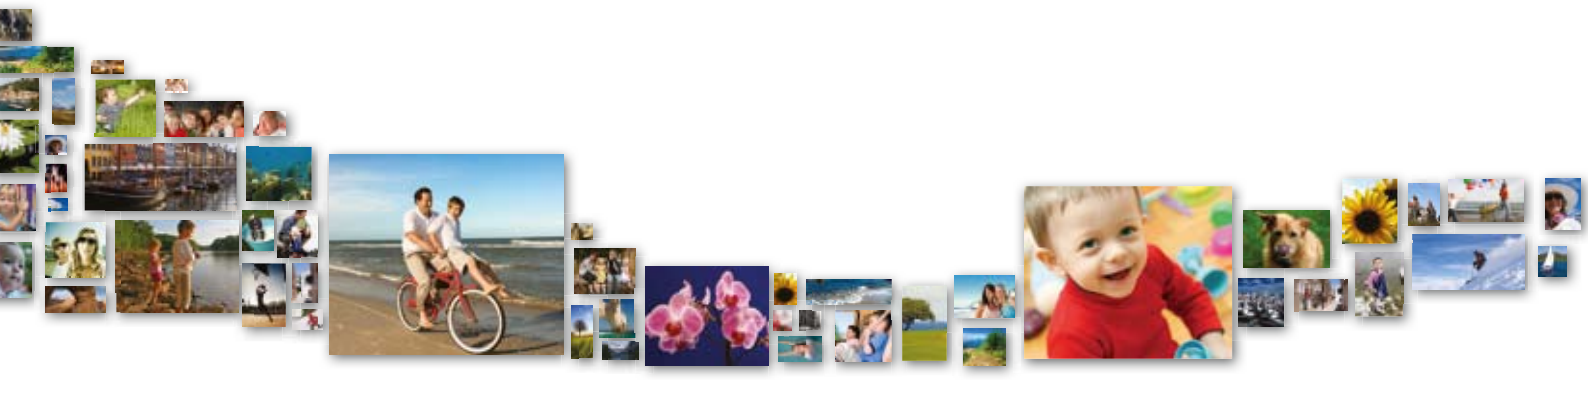

	PowerShot G10	PowerShot SX1 IS	PowerShot SX10 IS
FILE TYPES			
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, RAW, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, RAW (Firmware update may be required), Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	MOV [H.264 + Linear PCM (monaural)]	MOV [H.264 + Linear PCM (stereo)]	MOV [H.264 + Linear PCM (stereo)]
Sound Files	WAVE (monaural)	WAVE (stereo)	WAVE (stereo)
DIRECT PRINT			
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES
OTHER FEATURES			
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Camera/My Menu	Start-up image and camera sounds customisation Menu customisation	Start-up image and camera sounds customisation Menu customisation	Start-up image and camera sounds customisation Menu customisation
My Category	Image tagging feature	Image tagging feature	Image tagging feature
Sound Memo	Up to 60 sec per image	Up to 60 sec per image	Up to 60 sec per image
Intelligent Orientation Sensor	YES	YES	YES
Histogram	Yes, live histogram	Yes, live histogram	Yes, live histogram
Playback zoom	Approx. 2x – 10x	Approx. 2x – 10x	Approx. 2x – 10x
Self-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi
INTERFACE			
Computer	Hi-Speed USB (Mini-B, MTP, PTP)	Hi-Speed USB (Mini-B, MTP, PTP)	Hi-Speed USB (Mini-B, MTP, PTP)
Other	A/V output (PAL/NTSC)	HDMI Mini Connector. A/V output (PAL/NTSC)	A/V output (PAL/NTSC)
MEMORY CARD			
Type	SD, SDHC, MMC, MMCplus, HC MMCplus	SD, SDHC, MMC, MMCplus, HC MMCplus	SD, SDHC, MMC, MMCplus, HC MMCplus
SUPPORTED OPERATING SYSTEM			
PC & Macintosh	Windows XP SP2 / Vista (including SP1), Mac OS X v10.4 - 10.5	Windows XP SP2 / Vista (including SP1), Mac OS X v10.4 - 10.5	Windows XP SP2 / Vista (including SP1), Mac OS X v10.4 - 10.5
SOFTWARE			
Browsing & Printing	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser
Other	PhotoStitch, RemoteCapture	PhotoStitch	PhotoStitch
POWER SOURCE			
Batteries	Rechargeable Li-ion Battery NB-7L (NB-7L battery and charger supplied)	4x Size-AA Alkaline or NiMH Batteries(NB4-300) (Alkalines supplied)	4x Size-AA Alkaline or NiMH Batteries(NB4-300), (Alkalines supplied)
Battery life	Approx. 400 shots[8] Approx. 600 min. playback	Approx. 160 shots (with supplied batteries)[8] Approx. 420 shots (with optional Canon NB4-300 batteries)[8] Approx. 720 min. playback (with supplied batteries)[8] Approx. 840 min. playback (with Canon NB4-300 batteries)[8]	Approx. 340 shots (with supplied batteries)[8] Approx. 600 shots (with optional Canon NB4-300 batteries)[8] Approx. 720 min. playback (with supplied batteries)[8] Approx. 840 min. playback (with Canon NB4-300 batteries)[8]
A/C Power Supply	Optional, AC Adapter Kit ACK-DC50	Optional, Power adapter CA-PS700	Optional, Power adapter CA-PS700
ACCESSORIES			
Case	Soft Case DCC-650, SC-DC60A	Soft Case DCC-800	Soft Case DCC-800
Waterproof / Weatherproof Case	Waterproof Case (40m) WP-DC28, Waterproof Case Weight WW-DC1	-	
Lenses	Tele-converter 1.4x TC-DC58D, Lens adapter LA-DC58K	-	
Flash	Canon Speedlites (220EX, 430EX II, 580EX II [4]), Macro Twin Lite MT-14EX, Macro Ring Lite MR-24EX, Speedlite Transmitter ST-E2, Off-Camera Shoe Cord OC-E3, Speedlite Bracket BKT-DC1 (for use with Macro Twin/Ring Lite), High Power Flash HF-DC1	Canon Speedlites (220EX, 430EX II, 580EX, 580EX II[4]), Speedlite Transmitter ST-E2, Off-Camera Shoe Cord OC-E3, High Power Flash HF-DC1	Canon Speedlites (220EX, 430EX II, 580EX, 580EX II[4]), Speedlite Transmitter ST-E2, Off-Camera Shoe Cord OC-E3, High Power Flash HF-DC1
Remote	Remote Switch RS-60E3		
Controller/ Switch		Wireless Controller WL-DC300	
Power Supply & Battery Chargers	AC Adapter Kit ACK-DC50, Battery Charger CB-2LZE	Compact AC power adapter CA-PS700, Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300	Compact AC power adapter CA-PS700, Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300
Other	Ring Accessory Kit RAK-DC2	Canon HDMI Cable HTC-100	
PHYSICAL SPECIFICATIONS			
Operating Environment	0 – 40 °C, 10 – 90% humidity	0 – 40 °C[9], 10 – 90% humidity	0 – 40 °C[9], 10 – 90% humidity
Dimensions (WxHxD)	109.1 x 77.7 x 45.9 mm (excluding protrusions)	127.5 x 88.3 x 87.7 mm (excluding protrusions)	124.0 x 88.3 x 86.9 mm (excluding protrusions)
Weight (body only)	Approx. 350g	Approx. 585g	Approx. 560g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Depending on the image size selected.
2 Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
3 Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
4 Not all functions of the flash are supported.
5 Recording pixels fixed at 1600 x 1200.
6 Under conditions where the flash does not fire.
7 Depending on memory card speed / capacity / compression setting.
8 Using the batteries and memory card format supplied with the camera, except where indicated.
9 0 – 35 °C when NB-3AH is used
10 Some settings limit availability.
11 The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6

	PowerShot SX200 IS	PowerShot SX110 IS	PowerShot D10
IMAGE SENSOR			
Type	1/2.3" CCD	1/2.3" CCD	1/2.3" CCD
Effective Pixels	Approx 12.1M	Approx 9.0M	Approx.12.1M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR			
Type	DIGIC 4 with iSAPS technology	DIGIC III with iSAPS technology	DIGIC 4 with iSAPS technology
LENS			
Focal Length	5.0 - 60.0 mm (35mm equivalent: 28-336mm)	6.0 - 60.0 mm (35mm equivalent: 36-360mm)	6.2 – 18.6 mm (35mm equivalent: 35 – 105mm)
Zoom	Optical 12x. Digital approx. 4x (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom [1])[2]. Combined approx. 48x	Optical 10x. Digital approx. 4x (with Digital Tele-Converter approx. 1.3x or 2. 2x and Safety Zoom[1])[2]. Combined approx. 40x	Optical 3x. Digital approx. 4x [2] (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom [1])[2]. Combined approx. 12x
Maximum f/number	f/3.4 - f/5.3	f/2.8 - f/4.3	f/2.8 – f/4.9
Construction	11 elements in 9 groups (1 aspherical element)	10 elements in 9 groups (1 aspherical element)	6 elements in 5 groups (1 double sided aspherical UA element, 1 single sided UA element)
Image Stabilisation	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)
FOCUSING			
Type	TTL	TTL	TTL
AF System/Points	Face Detection, 1-point AF (fixed to centre or Face Select and Track)	Face Detection, 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)
AF Modes	Single, Continuous, Servo AF[10]	Single, Continuous	Single, Continuous [10], Servo AF [10]
AF Point Selection	Size (Normal, Small)	Size (Normal, Small)	Size (Normal, Small)
AF Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
AF Assist Beam	YES	YES	YES
Manual Focus	YES	YES	YES
Closest Focusing Distance	0cm (W) from front of lens in Super Macro	1cm (W) from front of lens in macro	3cm (W) from front of lens in macro
EXPOSURE CONTROL			
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (Centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (Centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)
AE Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
Exposure Compensation	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments	+/- 2 EV in 1/3 stop increments
ISO sensitivity [3]	AUTO, 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600
SHUTTER			
Speed	1 - 1/3200 sec (factory default) 15 - 1/3200 sec (total range - varies by shooting mode)	1/60 - 1/2500 sec (factory default) 15 - 1/2500 sec (total range - varies by shooting mode)	1 - 1/1500 sec (factory default) 15 - 1/1500 sec (total range - varies by shooting mode)
WHITE BALANCE			
Type	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Underwater, Custom
LCD MONITOR			
Monitor	3.0" TFT, approx. 230,000 dots	3.0" TFT, approx. 230,000 dots	2.5" PureColor LCD II (TFT), approx. 230,000 dots
Coverage	100%	100%	100%
Brightness	Adjustable to one of five levels	Adjustable to one of five levels	Adjustable to one of five levels
FLASH			
Modes	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off
Slow Sync Speed	YES	YES	YES
Red-Eye Reduction	YES	YES	YES
Flash Exposure Compensation	+/- 2 EV in 1/3 stop increments. Face Detection FE. Safety FE.	+/- 2 EV in 1/3 stop increments. Face Detection FE. Safety FE.	Face Detection FE
Flash Exposure Lock	YES	YES	YES
Manual Power Adjustment	3 levels with internal flash	3 levels with internal flash	
Second Curtain Synchronisation	-	-	-
Built-in Flash Range	50cm-3.0m (W) / 1.0m-2.0m (T)	50cm-3.0m (W) / 50cm-2.0m (T)	30cm - 3.2m (W) / 2.0m (T)
External Flash	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1
SHOOTING			
Modes	Auto*, Program AE, Shutter priority AE, Aperture priority AE, Manual, Easy*, Portrait, Landscape, Night Snapshot, Kids & Pets, Indoor, Special Scene (Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, ISO 3200[5], Color Accent, Color Swap, Stitch Assist), Movie *with Scene Detection Technology and Motion Detection Technology	Auto, Program AE, Shutter priority AE, Aperture priority AE, Manual, Easy, Portrait, Landscape, Night Snapshot, Kids & Pets, Indoor, Special Scene (Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, ISO 3200)[5], Movie	Auto*, P, Movie, Special Scene (Portrait, Landscape, Night Snapshot, Kids & Pets, Indoor, Sunset, Fireworks, Long Shutter, Beach, Underwater, Aquarium, Foliage, Snow, ISO 3200[5], Color Accent, Color Swap, Stitch Assist). *with Scene Detection Technology and Motion Detection Technology
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color(Limited))	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)
Drive modes	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer
Continuous Shooting	Approx. 0.8 shots/sec.[6], AF: Approx. 0.5 shots/sec.[6], LV: Approx. 0.6 shots/sec.[6] (until memory card becomes full) [7]	Approx. 1.2 shots/sec.[6] AF/LV: Approx. 0.7 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.1 shots/sec.[6] (until memory card becomes full) [7]
RECORDING PIXELS/COMPRESSION			
Image Size	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)	(L) 3456 x 2592, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3, Postcard Date Imprint) 1600 x 1200, (S) 640 x 480, (W) 3456 x 1944. Resize in playback (M3, S, 320 x 240)	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)
Compression	Fine, Normal	Superfine, Fine, Normal	Fine, Normal
Movies	(HD) 1280 x 720, 30fps, (L)640 x 480, 30fps, (M)320 x 240, 30fps	(L)640 x 480, 30fps/30fps(LP) (M)320 x 240, 30fps , (S)160x120, 15fps	(L)640 x 480, 30fps, (M)320 x 240, 30fps
Movie Length	Up to 4GB or 29 min. 59 sec (HD) [11] Up to 4GB or 1 hour (L, M) [7]	Up to 4GB or 1 hour (L, M)[7] Up to 3 mins (S)[7]	Up to 4GB or 1 hour (L and M)[7]
FILE TYPES			
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	MOV [H.264 + Linear PCM (monaural)]	AVI [Motion JPEG compression + WAVE (monaural)]	MOV [H.264 + Linear PCM (monaural)]
Sound Files	WAVE (monaural)	WAVE (monaural)	
DIRECT PRINT			
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES

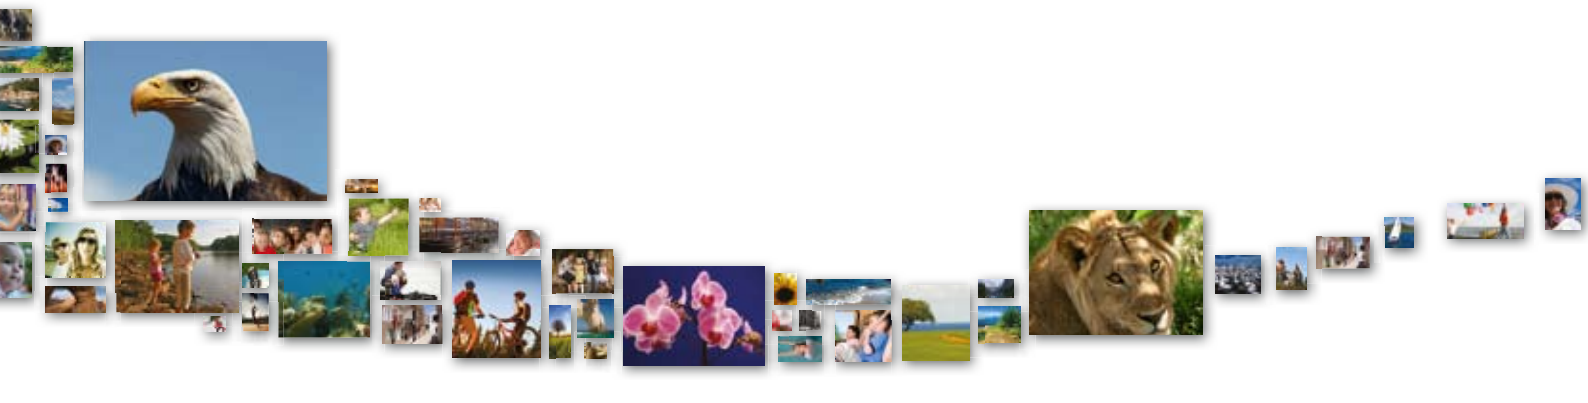

	PowerShot SX200 IS	PowerShot SX110 IS	PowerShot D10
OTHER FEATURES			
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Camera/My Menu	Start-up image and camera sounds customisation (Pre-Installed items only)	Start-up image and camera sounds customisation (Pre-Installed items only)	-
My Category	Image tagging feature	Image tagging feature	Image tagging feature
Sound Memo	-	Up to 60 sec per image	-
Intelligent Orientation Sensor	YES	YES	YES
Histogram	YES	YES	YES
Playback zoom	Approx. 2x - 10x	Approx. 2x - 10x	Approx. 2x - 10x
Self-Timer	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec., Custom or FaceSelf-Timer
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi
INTERFACE			
Computer	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)
Other	HDMI Mini Connector. A/V output (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)
MEMORY CARD			
Type	SD, SDHC, MMC, MMCplus, HC MMCplus	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus
SUPPORTED OPERATING SYSTEM			
PC & Macintosh	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5
SOFTWARE			
Browsing & Printing	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser
Other	PhotoStitch	PhotoStitch, RemoteCapture	PhotoStitch
POWER SOURCE			
Batteries	Rechargeable Li-ion Battery NB-5L (battery and charger supplied)	2x Size-AA Alkaline or NiMH Batteries(NB4-300) (Alkalines supplied)	Rechargeable Li-ion Battery NB-6L (battery and charger supplied)
Battery life	Approx. 280 shots [8] Approx. 300 min. playback	Approx. 140 shots[9] (with supplied batteries) Approx. 400 shots (with optional Canon NB4-300 batteries)[9] Approx. 300 min. playback (with supplied batteries) Approx. 480 min. playback (with Canon NB4-300 batteries)	Approx. 220 shots [8] Approx. 360 min. playback
A/C Power Supply	Optional, AC Adapter Kit ACK-DC30	Optional, AC Adapter Kit ACK800	Optional, AC adapter kit ACK-DC40
ACCESSORIES			
Cases/straps	Soft Case DCC-1000	Soft Case DCC-750	Soft Case SC-DC70 Shoulder & Neck Strap Set STP-DC1 Carabiner Strap STP-DC2 (optional straps are not designed for use under water)
Flash	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1
Power Supply & Battery Chargers	AC Adapter Kit ACK-DC30	AC Adapter Kit ACK800, Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300	AC Adapter Kit ACK-DC40
Other	Canon HDMI Cable HTC-100		Front Cover Set FC-DC1
PHYSICAL SPECIFICATIONS			
Operating Environment	0 - 40 °C, 10 - 90% humidity	0 - 40 °C[9], 10 - 90% humidity	-10 - 40 °C, 10 - 90% humidity Waterproof to 10m (IEC/JIS IP Protection Rating IPX8 equivalent) Dustproof (IEC/JIS IP Protection Rating IPX6 equivalent) Shockproof to 1.22m[12]
Dimensions (WxHxD)	103.0 x 60.5 x 37.6 mm	110.6 x 70.4 x 44.7 mm (excluding protrusions)	103.6 x 66.9 x 48.8mm
Weight (body only)	Approx 220g	Approx 245g	Approx. 190g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

[1] Depending on the image size selected.
[2] Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
[3] Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
[4] Not all functions of the flash are supported.
[5] Recording pixels fixed at 1600 x 1200.
[6] Under conditions where the flash does not fire.
[7] Depending on memory card speed / capacity / compression setting.
[8] Using the batteries and memory card format supplied with the camera, except where indicated.
[9] 0 - 35 °C when NB-3AH is used
[10] Some settings limit availability.
[11] The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6
[12] The shock resistant testing methods are unique to this product and do not guarantee against damage or malfunction of the product.

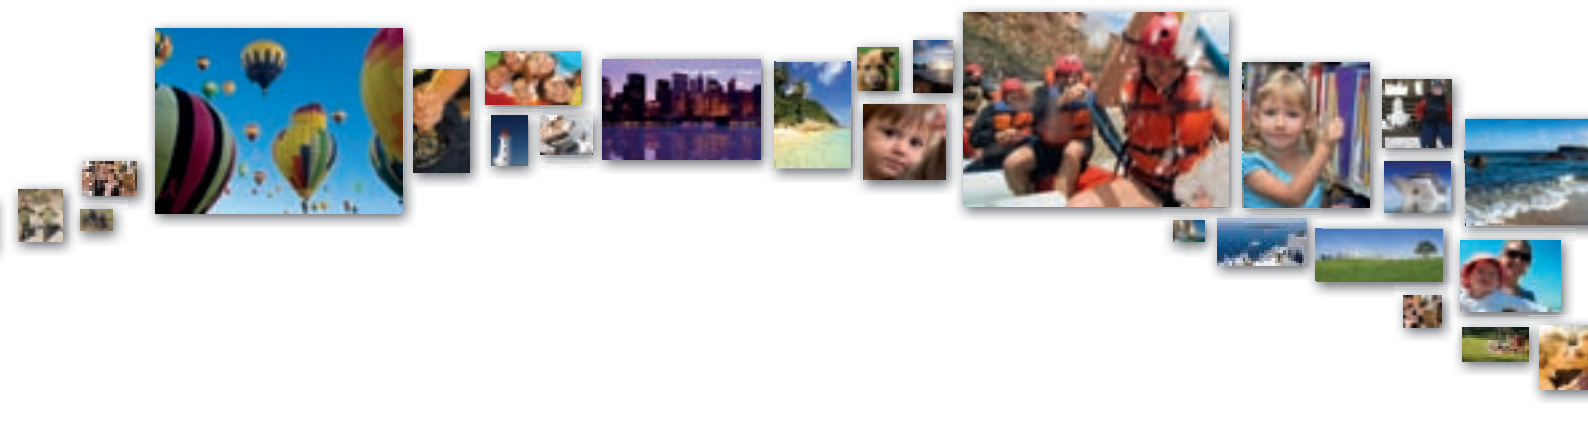

	PowerShot E1	PowerShot A2100 IS	PowerShot A1100 IS
IMAGE SENSOR			
Type	1/2.3" CCD	1/2.3" CCD	1/2.3" CCD
Effective Pixels	Approx 10.0M	Approx 12.1M	Approx 12.1M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR			
Type	DIGIC III with iSAPS technology	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology
LENS			
Focal Length	6.2 – 24.8 mm (35mm equivalent: 35 – 140mm)	6.4 – 38.4 mm (35mm equivalent: 36 – 216mm)	6.2 – 24.8 mm (35mm equivalent: 35 – 140mm)
Zoom	Optical 4x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.4x or 2.3x and Safety Zoom [1])[2]. Combined approx. 16x	Optical 6x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom [1])[2]. Combined approx. 24x	Optical 4x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom [1])[2]. Combined approx. 16x
Maximum f/number	f/2.7 – f/5.6	f/3.2 – f/5.9	f/2.7 – f/5.6
Construction	7 elements in 5 groups 2 single side aspherical lens	9 elements in 7 groups (including 1 double-sided aspherical element)	7 elements in 5 groups 2 single sided aspherical lenses
Image Stabilisation	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)
FOCUSING			
Type	TTL	TTL	TTL
AF System/Points	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)
AF Modes	-	Single, Continuous [10]	Single, Continuous [10]
AF Point Selection	Size (Normal, Small)	Size (Normal, Small)	Size (Normal, Small)
AF Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
AF Assist Beam	YES	YES	YES
Manual Focus	-	-	-
Closest Focusing Distance	3cm (W) from front of lens in macro	1cm (W) from front of lens in macro	3cm (W) from front of lens in macro
EXPOSURE CONTROL			
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)
AE Lock	Locked when shutter button is pressed half way	Locked when shutter button is pressed half way	Locked when shutter button is pressed half way
Exposure Compensation	+/- 2 EV in 1/3 stop increments	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction
ISO sensitivity [3]	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600
SHUTTER			
Speed	1/60 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)	1/60 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)	1 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)
WHITE BALANCE			
Type	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom
VIEWFINDER			
Viewfinder	Real-image zoom, optical viewfinder		Real-image zoom, optical viewfinder
LCD MONITOR			
Monitor	2.5" TFT, approx. 115,000 dots	3.0" TFT, approx. 230,000 dots	2.5" TFT, approx. 115,000 dots
Coverage	100%	100%	100%
Brightness	-	Adjustable to one of five levels	-
FLASH			
Modes	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off	Auto, Manual Flash On/Off
Slow Sync Speed	YES	YES	YES
Red-Eye Reduction	YES	YES	YES
Flash Exposure Compensation	Face Detection FE	Face Detection FE	Face Detection FE
Flash Exposure Lock	YES	YES	YES
Manual Power Adjustment	-	-	-
Second Curtain Synchronisation	-	-	-
Built-in Flash Range	30cm - 4.0m (W) / 2.0m (T)	30cm-3.5m (W) / 2.0m (T)	30cm - 4.0m (W) / 2.0m (T)
External Flash	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1
SHOOTING			
Modes	Auto, P, Easy, Portrait, Landscape, Night Snapshot, Indoor, Kids & Pets, Movie, Special Scene (Sunset, Foliage, Snow, Beach, Fireworks, Night Scene, Aquarium, ISO 3200)[5]	Auto*, P, Easy*, Portrait, Landscape, Night Snapshot, Indoor, Kids & Pets, Movie, Special Scene (Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Long Shutter, Aquarium, ISO 3200[5]). *with Scene Detection Technology and Motion Detection Technology	Auto*, P, Easy*, Portrait, Landscape, Night Snapshot, Indoor, Kids & Pets, Movie, Special Scene (Sunset, Foliage, Snow, Beach, Fireworks, Night Scene, Aquarium, ISO 3200[5], Long Shutter). *with Scene Detection Technology and Motion Detection Technology
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))
Drive modes	Single, Self-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Self-Timer, FaceSelf-Timer
Continuous Shooting	Approx. 1.3 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.1 shots/sec.[6] (until memory card becomes full) [7]	Approx. 1.1 shots/sec.[6] (until memory card becomes full)[7]
RECORDING PIXELS/COMPRESSION			
Image Size	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3, Date Stamp) 1600 x 1200, (S) 640 x 480, (W) 3648 x 2048. Resize in playback (M3, S, 320 x 240)	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)
Compression	Superfine, Fine, Normal	Fine, Normal	Fine, Normal
Movies	(L)640 x 480, 30fps/30fps(LP) (M)320 x 240, 30fps, (S)160 x 120, 15fps	(L)640 x 480, 30fps/30fps(LP) (M)320 x 240, 30fps	(L)640 x 480, 30fps/30fps(LP) (M)320 x 240, 30fps
Movie Length	Up to 4GB or 1 hour (L and M)[7] Up to 3 mins (S)[7]	Up to 4GB or 1 hour (L and M) [7]	Up to 4GB or 1 hour (L and M) [7]
FILE TYPES			
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	AVI [Motion JPEG compression + WAVE (monaural)]	AVI [Motion JPEG compression + WAVE (monaural)]	AVI [Motion JPEG compression + WAVE (monaural)]
Sound Files	WAVE (monaural)	WAVE (monaural)	-
DIRECT PRINT			
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES

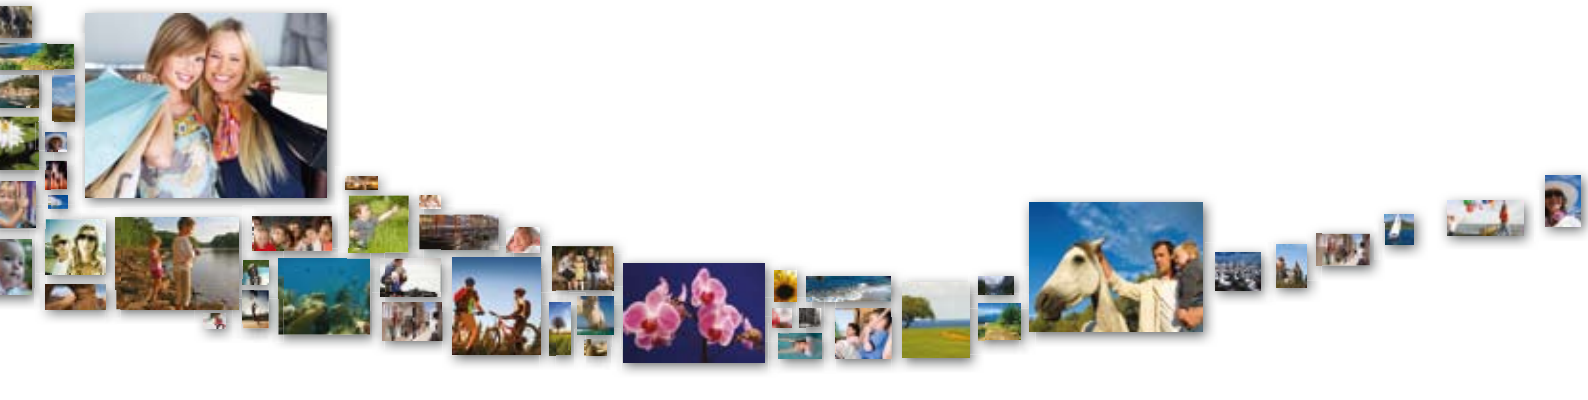

	PowerShot E1	PowerShot A2100 IS	PowerShot A1100 IS
OTHER FEATURES			
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Camera/My Menu	-	-	-
My Category	Image tagging feature	Image tagging feature	-
Sound Memo	Up to 60 sec per image	-	-
Intelligent Orientation Sensor	YES	YES	YES
Histogram	YES	YES	YES
Playback zoom	Approx. 2x - 10x	Approx. 2x - 10x	Approx. 2x - 10x
Self-Timer	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi
INTERFACE			
Computer	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)
Other	A/V output, dedicated connector (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)
MEMORY CARD			
Type	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus. 128MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus. 128MB memory card supplied
SUPPORTED OPERATING SYSTEM			
PC & Macintosh	Windows XP SP2 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5
SOFTWARE			
Browsing & Printing	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser
Other	PhotoStitch	PhotoStitch	PhotoStitch
POWER SOURCE			
Batteries	2x Size-AA Alkaline or NiMH Batteries (NB4-300) (Alkalines supplied)	2x Size-AA Alkaline or NiMH Batteries(NB4-300) (Alkalines supplied)	2x Size-AA Alkaline or NiMH Batteries (NB4-300) (Alkalines supplied)
Battery life	Approx. 220 shots[8] (with supplied batteries) Approx. 450 shots (with optional Canon NB-3AH batteries)[8] Approx. 480 min. playback (with supplied batteries) Approx. 600 min. playback (with Canon NB-3AH batteries)	Approx. 160 shots[8] (with supplied batteries) Approx. 400 shots (with optional Canon NB-3AH batteries)[8] Approx. 540 min. playback (with supplied batteries) Approx. 660 min. playback (with Canon NB-3AH batteries)	Approx. 140 shots[8] (with supplied batteries) Approx. 350 shots (with optional Canon NB-3AH batteries)[8] Approx. 360 min. playback (with supplied batteries) Approx. 480 min. playback (with Canon NB-3AH batteries)
A/C Power Supply	Optional, AC Adapter Kit ACK800	Optional, AC Adapter Kit ACK800	Optional, AC Adapter Kit ACK800
ACCESSORIES			
Cases/Straps	Soft Case DCC-900	Soft Case DCC-85	Soft Case DCC-85
Flash	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1
Power Supply & Battery Chargers	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800
Other			
PHYSICAL SPECIFICATIONS			
Operating Environment	0 - 40 °C[9], 10 - 90% humidity	0 - 40 °C[9], 10 - 90% humidity	0 - 40 °C[9], 10 - 90% humidity
Dimensions (WxHxD)	101.2 x 63.8 x 31.4mm	101.9 x 63.5 x 31.9 mm	95.4 x 62.4 x 31.0mm
Weight (body only)	Approx. 160g	Approx. 185g	Approx. 155g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Depending on the image size selected.
2 Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
3 Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
4 Not all functions of the flash are supported.
5 Recording pixels fixed at 1600 x 1200.
6 Under conditions where the flash does not fire.
7 Depending on memory card speed / capacity / compression setting.
8 Using the batteries and memory card format supplied with the camera, except where indicated.
9 0 - 35 °C when NB-3AH is used
10 Some settings limit availability.
11 The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6

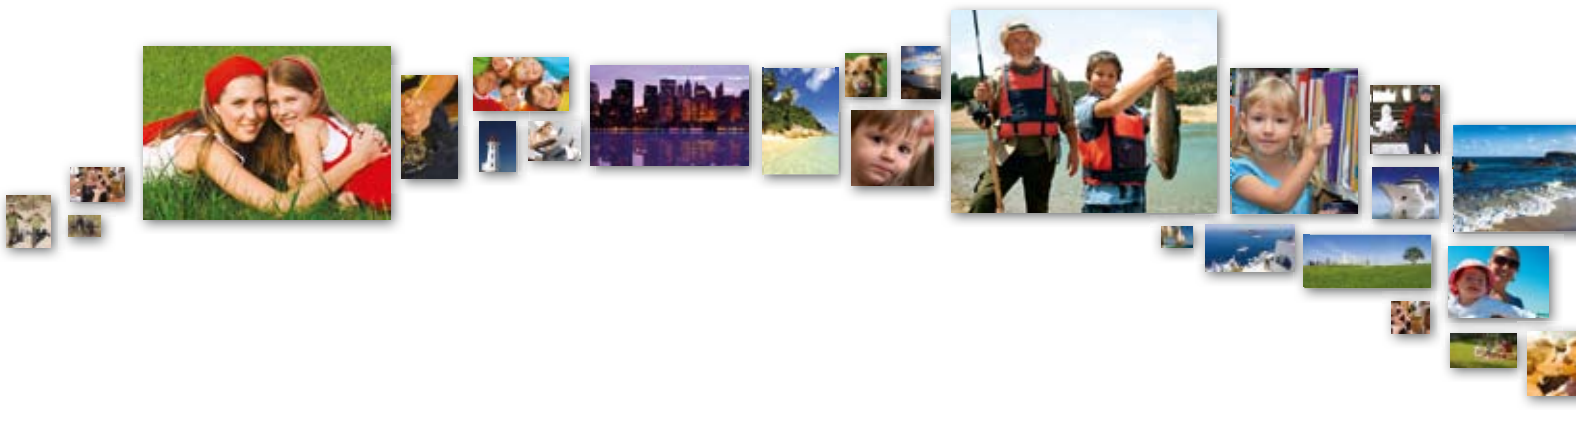

	PowerShot A590 IS	PowerShot A480	PowerShot A470
IMAGE SENSOR			
Type	1/2.5" CCD	1/2.3" CCD	1/2.5" CCD
Effective Pixels	Approx 8.0M	Approx.10.0M	Approx.7.1M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR			
Type	DIGIC III with iSAPS technology	DIGIC III with iSAPS technology	DIGIC III with iSAPS technology
LENS			
Focal Length	5.8 - 23.2 mm (35mm equivalent: 35 - 140mm)	6.6 - 21.6 mm (35mm equivalent: 37 – 122mm)	6.3 - 21.6 mm (35mm equivalent: 38 - 132mm)
Zoom	Optical 4x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.6x or 2.0x and Safety Zoom[1])[2]. Combined approx. 16x	Optical 3.3x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.4x or 2.3x and Safety Zoom[1])[2]. Combined approx. 13x	Optical 3.4x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.5x or 1.9x and Safety Zoom[1])[2]. Combined approx. 14x
Maximum f/number	f/2.6 - f/5.5	f/3.0 - f/5.8	f/3.0 - f/5.8
Construction	7 elements in 5 groups (2 aspherical elements)	7 elements in 6 groups (1 aspherical UA element)	7 elements in 6 groups (1 aspherical element)
Image Stabilisation	Yes (shift-type)	-	-
FOCUSING			
Type	TTL	TTL	TTL
AF System/Points	AiAF (Face Detection/9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 5-point), 1-point AF (fixed centre)	AiAF (Face Detection/9-point), 1-point AF (fixed to centre or Face Select and Track)
AF Modes	-	Single	-
AF Point Selection	-	Size (Normal, Small)	-
AF Lock	On/Off Selectable	Locked when shutter button is pressed half way	Locked when shutter button is pressed half way
AF Assist Beam	YES	YES	YES
Manual Focus	YES	-	-
Closest Focusing Distance	5cm (W) from front of lens in Macro	1cm (W) from front of lens in Super Macro	1cm (W) from front of lens in Super Macro
EXPOSURE CONTROL			
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)
AE Lock	Locked when shutter button is pressed half way	Locked when shutter button is pressed half way	Locked when shutter button is pressed half way
Exposure Compensation	+/- 2 EV in 1/3 stop increments	+/- 2 EV in 1/3 stop increments	+/- 2 EV in 1/3 stop increments
ISO sensitivity[3]	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600
SHUTTER			
Speed	1/60 - 1/2,000 sec. (factory default) 15 - 1/2,000 sec. (total range - varies by shooting mode)	1/60 - 1/2000 sec (factory default) 15 - 1/2000 sec (total range - varies by shooting mode)	1/60 - 1/2,000 sec. (factory default) 15 - 1/2,000 sec. (total range - varies by shooting mode)
WHITE BALANCE			
Type	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom
VIEWFINDER			
Viewfinder	Real-image zoom, optical viewfinder	-	-
LCD MONITOR			
Monitor	2.5" TFT, approx. 115,000 dots	2.5" TFT, approx. 115,000 dots	2.5" TFT, approx. 115,000 dots
Coverage	100%	100%	100%
Brightness	-	-	-
FLASH			
Modes	Auto, Manual Flash On/Off	Auto, Manual Flash On/Off	Auto, Manual Flash On/Off
Slow Sync Speed	-	YES	YES
Red-Eye Reduction	YES	YES	YES
Flash Exposure Compensation	+/- 2 EV in 1/3 stop increments, Face Detection FE, Safety FE	Face Detection FE	Face Detection FE
Flash Exposure Lock	-	-	-
Manual Power Adjustment	3 levels with internal flash	-	-
Built-in Flash Range	30cm-3.5m (W)/2.2m (T)	30cm - 3.0m (W) / 2.0m (T)	30cm - 3.0m (W)/2.0m (T)
External Flash	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1
SHOOTING			
Modes	Auto, Program AE, Shutter priority AE, Aperture priority AE, Manual, Easy, Portrait, Landscape, Night Snapshot, Kids & Pets, Indoor, Movie, Special Scene (Night Scene, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium)	Auto, P, Special Scene (Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Long Shutter, Super Macro), Movie	Auto, Manual, Super Macro, Movie, Special Scene (Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium)
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))
Drive modes	Single, Continuous, Self-Timer	Single, Self-Timer	Single, Self-Timer
Continuous Shooting	Approx. 1.4 shots/sec.[6] (until memory card becomes full)[7]	Approx. 0.8 shots/sec.[6] (until the memory card is full)[7]	Approx. 1.9 shots/sec.[6] (until the memory card is full)[7]
RECORDING PIXELS/COMPRESSION			
Image Size	(L) 3264 x 2448, (M1) 2592 x 1944, (M2) 2048 x 1536, (M3, Date Stamp) 1600 x 1200, (S) 640 x 480, (W) 3264 x 1832. Resize in playback, (M3, S, 320 x 240)	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3, Date Stamp) 1600 x 1200, (S) 640 x 480, (W) 3648 x 2048. Resize in playback (M3, S, 320 x 240)	(L) 3072 x 2304, (M1) 2592 x 1944, (M2) 2048 x 1536, (M3, Date Stamp) 1600 x 1200, (S) 640 x 480, (W) 3072 x 1728. Resize in playback, (M3, S, 320 x 240)
Compression	Superfine, Fine, Normal	Fine, Normal	Superfine, Fine, Normal
Movies	(L)640 x 480, 20fps/20fps(LP) (M)320 x 240, 30fps (S)160 x 120, 15fps	(L)640 x 480, 30fps/30fps(LP) (M)320 x 240, 30fps	(L)640 x 480, 20fps/20fps(LP) (M)320 x 240, 30fps, (S)160 x 120, 15fps
Movie Length	Up to 4GB or 1 hour (L and M)[7] Up to 3 mins (S)[7]	Up to 4GB or 1 hour (L and M)[7]	Up to 4GB or 1 hour (L and M)[7] Up to 3 mins (S)[7]
FILE TYPES			
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant)/Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant)/Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	AVI [Motion JPEG compression + WAVE (monaural)]	AVI [Motion JPEG compression]	AVI [Motion JPEG compression]
Sound Files	WAVE (monaural)	-	WAVE (monaural)
DIRECT PRINT			
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES

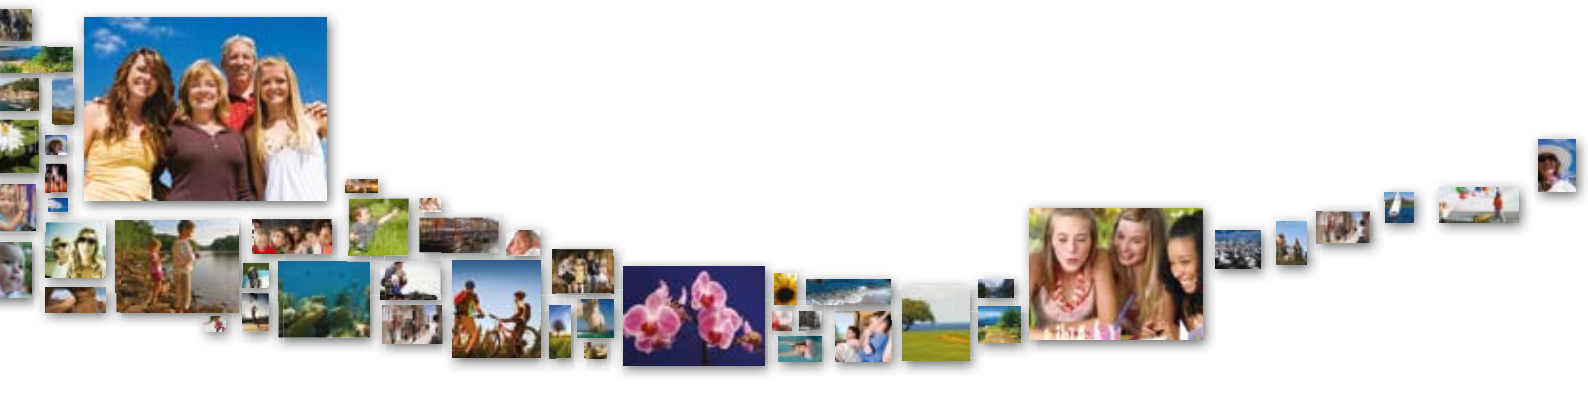

	PowerShot A590 IS	PowerShot A480	PowerShot A470
OTHER FEATURES			
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Category	Image tagging feature	–	Image tagging feature
Sound Memo	Up to 60 sec per image	–	Up to 60 sec. per image
Intelligent Orientation Sensor	YES	–	YES
Histogram	YES	YES	YES
Playback zoom	Approx. 2x – 10x	Approx. 2x – 10x	Approx. 2x – 10x
Self-Timer	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian
INTERFACE			
Computer	Hi-Speed USB (Mini-B, MTP, PTP)	USB (Mini-B, MTP, PTP)	USB (Mini-B, MTP, PTP)
Other	A/V output (PAL/NTSC)	A/V output (PAL/NTSC)	A/V output (PAL/NTSC)
MEMORY CARD			
Type	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB Memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied
SUPPORTED OPERATING SYSTEM			
PC & Macintosh	Windows 2000 SP4/XP SP2/Vista Mac OS X v10.3 - 10.4	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows 2000 SP4/XP SP2/Vista
SOFTWARE			
Browsing & Printing	ZoomBrowser EX/ImageBrowser	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX/ImageBrowser
Other	PhotoStitch	PhotoStitch	PhotoStitch
Drivers	TWAIN (2000)		TWAIN (2000)
POWER SOURCE			
Batteries	2x Size-AA Alkaline or NiMH Batteries (NB4-300) (Alkalines supplied)	2x Size-AA Alkaline or NiMH Batteries (Alkalines supplied)	2x Size-AA Alkaline or NiMH Batteries (Alkalines supplied)
Battery life	Approx. 200 shots[8] (with supplied batteries) Approx. 450 shots (with optional Canon NB-3AH batteries)[8] Approx. 540 min. playback (with supplied batteries) Approx. 660 min. playback (with Canon NB-3AH batteries)	Approx. 200 shots [8] (with supplied batteries) Approx. 470 shots (with optional Canon NB-3AH batteries) [8] Approx. 480 min. playback (with supplied batteries) Approx. 600 min. playback (with Canon NB-3AH batteries)	Approx. 150 shots[8] (with supplied batteries) Approx. 400 shots (with optional Canon NB-3AH batteries)[8] Approx. 360 min. playback (with supplied batteries) Approx. 480 min. playback (with Canon NB-3AH batteries)
A/C Power Supply	Optional, AC Adapter Kit ACK800	Optional, AC Adapter Kit ACK800	Optional, AC Adapter Kit ACK800
ACCESSORIES			
Cases/Straps	Soft Case DCC-80	Soft Case DCC-480	Soft Case DCC-450
Lenses	Tele-converter 1.75x TC-DC52A, Wide-converter 0.7x WC-DC52, Close-up Lens 250D (52mm), Conversion Lens Adapter LA-DC52G	–	–
Flash	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1
Power Supply & Battery Chargers	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800	Battery Charger Kit CBK4-300, Ni-MH Batteries NB4-300, AC adapter kit ACK800
PHYSICAL SPECIFICATIONS			
Operating Environment	0 – 40 °C, 10 – 90% humidity	0 – 40 °C, 10 – 90% humidity	0 – 40 °C, 10 – 90% humidity
Dimensions (WxHxD)	94.3 x 64.7 x 40.8mm	92.1 x 62.0 x 31.1 mm	104.8 x 55.1 x 40.7mm
Weight (body only)	Approx. 175g	Approx. 140g	Approx. 165g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Depending on the image size selected.
2 Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
3 Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
4 Not all functions of the flash are supported.
5 Recording pixels fixed at 1600 x 1200.
6 Under conditions where the flash does not fire.
7 Depending on memory card speed / capacity / compression setting.
8 Using the batteries and memory card format supplied with the camera, except where indicated.
9 0 – 35 °C when NB-3AH is used
10 Some settings limit availability.
11 The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6

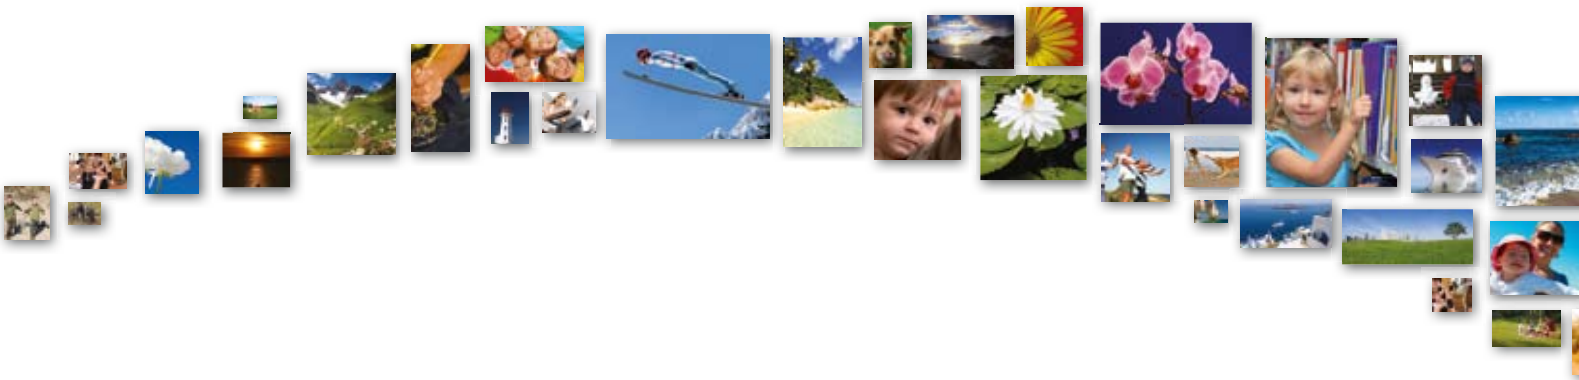

	DIGITAL IXUS 980 IS	DIGITAL IXUS 990 IS	DIGITAL IXUS 870 IS	DIGITAL IXUS 110 IS
IMAGE SENSOR				
Type	1/1.7" CCD	1/2.3" CCD	1/2.3" CCD	1/2.3" CCD
Effective Pixels	Approx.14.7M	Approx.12.1M	Approx.10.0M	Approx.12.1M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR				
Type	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology	DIGIC 4 with iSAPS technology
LENS				
Focal Length	7.7 - 28.5 mm (35mm equivalent: 36 – 133mm)	6.6 - 33.0 mm (35mm equivalent: 37 – 185mm)	5.0 - 20.0 mm (35mm equivalent: 28 – 112mm)	5.0 - 20.0 mm (35mm equivalent: 28 – 112mm)
Zoom	Optical 3.7x. Digital approx. 4x (with Digital Tele-Converter approx. 1.7x or 2.2x and Safety Zoom [1])[2]. Combined approx. 15x	Optical 5x. Digital approx. 4x (with Digital Tele-Converter approx.1.5x or 2.0x and Safety Zoom[1])[2]. Combined approx. 20x	Optical 4x. Digital approx. 4x (with Digital Tele-Converter approx.1.4x or 2.3x and Safety Zoom[1])[2]. Combined approx. 16x	Optical 4x. Digital approx. 4x (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom[1])[2]. Combined approx. 16x
Maximum f/number	f/2.8 – f/5.8	f/3.2 – f/5.7	f/2.8 – f/5.8	f/2.8 – f/5.8
Construction	7 elements in 5 groups (2 aspherical elements including 1 double-sided UA element)	8 elements in 6 groups (1 double sided UA element, 1 single sided UA element)	7 elements in 5 groups (2 aspherical elements including 1 double-sided UA element)	7 elements in 5 groups (1 double sided UA element, 1 single sided aspherical element)
Image Stabilisation	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)
FOCUSING				
Type	TTL	TTL	TTL	TTL
AF System/Points	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre)
AF Modes	Single, Servo AF[10]	Single, Servo AF[10]	Single, Servo AF[10]	Single, Continuous[10], Servo AF[10]
AF Point Selection	Size (Normal, Small)	Size (Normal, Small)	Size (Normal, Small)	Size (Normal, Small)
AF Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable	On/Off Selectable
AF Assist Beam	YES	YES	YES	YES
Manual Focus	YES	-	-	-
Closest Focusing Distance	5cm (W) from front of lens in macro	2cm (W) from front of lens in macro	2cm (W) from front of lens in macro	2cm (W) from front of lens in macro
EXPOSURE CONTROL				
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)
AE Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable	On/Off Selectable
Exposure Compensation	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction
ISO sensitivity [3]	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600
SHUTTER				
Speed	1/60 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)	1 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)	1/60 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)	1/8 - 1/1600 sec (factory default) 15 - 1/1600 sec (total range - varies by shooting mode)
WHITE BALANCE				
Type	TTL	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom
VIEWFINDER				
Viewfinder	Real-image zoom, optical viewfinder	-	-	-
LCD MONITOR				
Monitor	2.5" PureColor LCD II (TFT), approx. 230,000 dots	3.0" PureColor LCD II (TFT), approx. 461,000 dots	3.0" PureColor LCD II (TFT), approx. 230,000 dots	2.8" PureColor LCD II (TFT), aspect ratio 16:9, approx. 230,000 dots
Coverage	100%	100%	100%	100%
Brightness	Adjustable to one of fifteen levels	Adjustable to one of five levels	Adjustable to one of fifteen levels	Adjustable to one of five levels
FLASH				
Modes	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off	Auto, Manual Flash On / Off	Auto, Manual Flash On/Off
Slow Sync Speed	YES	YES	YES	YES
Red-Eye Reduction	YES	YES	YES	YES
Flash Exposure Compensation	+/- 2 EV in 1/3 stop increments. Face Detection FE	Face Detection FE	Face Detection FE	Face Detection FE
Flash Exposure Lock	YES	YES	YES	YES
Manual Power Adjustment	3 levels with internal flash	-	-	-
Built-in Flash Range	50cm - 4.6m (W) / 2.4m (T)	30cm - 3.5m (W) / 2.0m (T)	30cm - 4.2m (W) / 2.0m (T)	30cm - 4.0m (W) / 2.0m (T)
External Flash	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1
SHOOTING				
Modes	Auto, P, M, Quick, Movie, Special Scene (Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater, ISO 3200[5], Digital Macro, Color Accent, Color Swap, Stitch Assist)	Auto*, P, Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Creative Light Effect, Fireworks, Long Shutter, Beach, Aquarium, Foliage, Snow, ISO 3200[5], Digital Macro, Zoom Blur, Color Accent, Color Swap, Stitch Assist, Movie. *with Scene Detection Technology and Motion Detection Technology	Auto, P, Movie, Special Scene (Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater, ISO 3200[5], Digital Macro, Color Accent, Color Swap, Stitch Assist)	Auto*, P, Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Fireworks, Long Shutter, Beach, Underwater, Aquarium, Foliage, Snow, ISO 3200[5], Digital Macro, Color Accent, Color Swap, Stitch Assist, Movie. *with Scene Detection Technology and Motion Detection Technology
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)
Drive modes	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer
Continuous Shooting	Approx. 1.3 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.0 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.4 shots/sec.[6] (until memory card becomes full)[7]	Approx. 0.8 shots/sec.[6] (until memory card becomes full)7
RECORDING PIXELS/ COMPRESSION				
Image Size	(L) 4416 x 3312, (M1) 3456 x 2592, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4416 x 2480. Resize in playback (M3, S, 320 x 240)	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3) 1600 x 1200, (S) 640 x 480, (W) 3648 x 2048. Resize in playback (M3, S, 320 x 240)	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)
Compression	Superfine, Fine, Normal	Fine, Normal	Superfine, Fine, Normal	Fine, Normal
Movies	640 x 480, 30fps 320 x 240, 30fps	(HD) 1280 x 720, 30fps, (L)640 x 480, 30fps, (M)320 x 240, 30fps	640 x 480, 30fps 320 x 240, 30fps	(HD) 1280 x 720, 30fps, (L)640 x 480, 30fps, (M)320 x 240, 30fps
Movie Length	Up to 4GB or 1 hour [7]	(HD) Up to 4GB or 29 min. 59 sec [11] (L and M) Up to 4GB or 1 hour [7]	Up to 4GB or 1 hour [7]	(HD) Up to 4GB or 29 min. 59 sec [11] (L and M) Up to 4GB or 1 hour [7]
FILE TYPES				
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	MOV [H.264 + Linear PCM (monaural)]	MOV [H.264 + Linear PCM (monaural)]	MOV [H.264 + Linear PCM (monaural)]	MOV [H.264 + Linear PCM (monaural)]
Sound Files	WAVE (monaural)	-	WAVE (monaural)	-

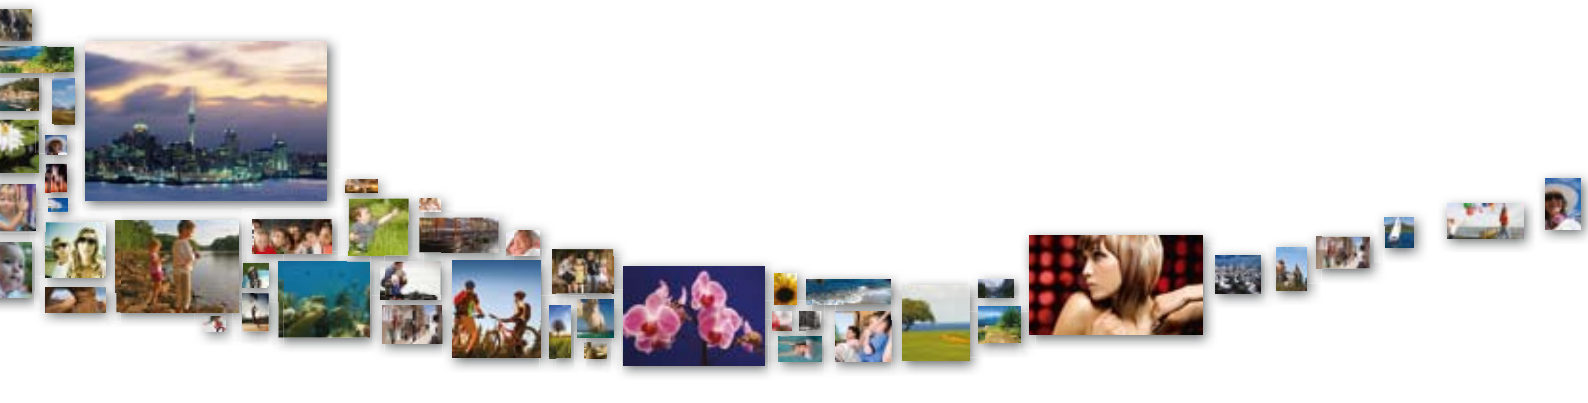

	DIGITAL IXUS 980 IS	DIGITAL IXUS 990 IS	DIGITAL IXUS 870 IS	DIGITAL IXUS 110 IS
DIRECT PRINT				
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES	YES
OTHER FEATURES				
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Camera/My Menu	Start-up image and camera sounds customisation	Start-up image and camera sounds customisation	Start-up image and camera sounds customisation	Start-up image and camera sounds customisation
My Category	Image tagging feature	Image tagging feature	Image tagging feature	Image tagging feature
Sound Memo	Up to 60 sec per image	-	Up to 60 sec per image	-
Intelligent Orientation Sensor	YES	YES	YES	YES
Histogram	Yes, live histogram	YES	YES	YES
Playback zoom	Approx. 2x – 10x	Approx. 2x – 10x	Approx. 2x – 10x	Approx. 2x – 10x
Self-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi
INTERFACE				
Computer	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)
Other	A/V output, dedicated connector (PAL/NTSC)	HDMI Mini Connector. A/V output (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)	HDMI Mini Connector. A/V output (PAL/NTSC)
MEMORY CARD				
Type	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus.
SUPPORTED OPERATING SYSTEM				
PC & Macintosh	Windows XP SP2 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2 / Vista (including SP1) Mac OS X v10.4 - 10.5	Windows XP SP2-3 / Vista (including SP1) Mac OS X v10.4 - 10.5
SOFTWARE				
Browsing & Printing	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX/ImageBrowser	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX / ImageBrowser
Other	PhotoStitch	PhotoStitch	PhotoStitch	PhotoStitch
Drivers	-	-	-	-
POWER SOURCE				
Batteries	Rechargeable Li-ion Battery NB-5L (battery and charger supplied)	Rechargeable Li-ion Battery NB-5L (battery and charger supplied)	Rechargeable Li-ion Battery NB-5L (battery and charger supplied)	Rechargeable Li-ion Battery NB-4L (battery and charger supplied)
Battery life	Approx. 280 shots[8] Approx. 360 min. playback	Approx. 270 shots[8] Approx. 360 min. playback	Approx. 310 shots[8] Approx. 420 min. playback	Approx. 200 shots[8] Approx. 300 min. playback
A/C Power Supply	Optional, AC adapter kit ACK-DC30	Optional, AC adapter kit ACK-DC30	Optional, AC adapter kit ACK-DC30	Optional, AC adapter kit ACK-DC10
ACCESSORIES				
Cases/Straps	Soft Leather Case DCC-70, Digital IXUS Metal or Leather Strap	Soft Leather Case DCC-70, Digital IXUS Metal or Leather Strap	Soft Leather Case DCC-75, Digital IXUS Metal or Leather Strap	Soft Leather Case DCC-1100, Digital IXUS Metal or Leather Strap
Waterproof / Weatherproof Case	Waterproof Case (40m) WP-DC27, Waterproof Case Weight WW-DC1		Waterproof Case (40m) WP-DC26, Waterproof Case Weight WW-DC1	Waterproof Case (40m) WP-DC32, Waterproof Case Weight WW-DC1
Flash	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1
Power Supply & Battery Chargers	AC Adapter Kit ACK-DC30	AC Adapter Kit ACK-DC30	AC Adapter Kit ACK-DC30	AC Adapter Kit ACK-DC10
Other		Canon HDMI Cable HTC-100		Canon HDMI Cable HTC-100
PHYSICAL SPECIFICATIONS				
Operating Environment	0 – 40 °C, 10 – 90% humidity	0 – 40 °C, 10 – 90% humidity	0 – 40 °C, 10 – 90% humidity	0 – 40 °C, 10 – 90% humidity
Dimensions (WxHxD)	96.7 x 62.2 x 27.9mm (excluding protrusions)	94.8 x 56.8 x 26.3 mm	93.8 x 56.8 x 23.6mm (excluding protrusions)	97.9 x 54.1 x 22.1mm
Weight (body only)	Approx. 160g	Approx. 160g	Approx. 155g	Approx. 145g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Depending on the image size selected.
2 Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
3 Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
4 Not all functions of the flash are supported.
5 Recording pixels fixed at 1600 x 1200.
6 Under conditions where the flash does not fire.
7 Depending on memory card speed / capacity / compression setting.
8 Using the batteries and memory card format supplied with the camera, except where indicated.
9 0 – 35 °C when NB-3AH is used
10 Some settings limit availability.
11 The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6

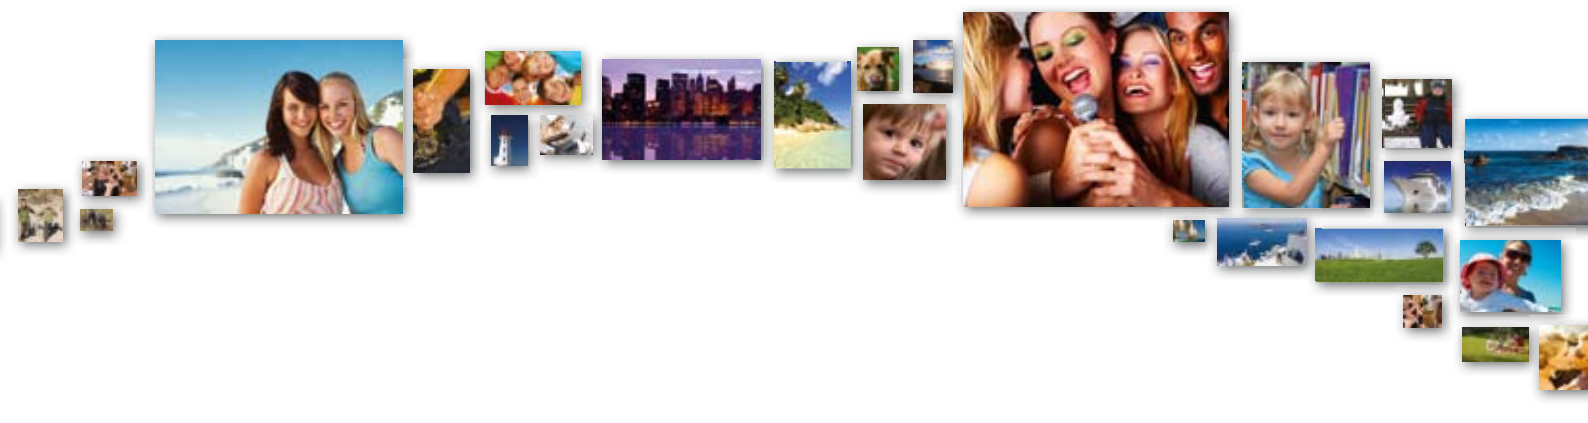

	DIGITAL IXUS 100 IS	DIGITAL IXUS 85 IS	DIGITAL IXUS 95 IS
IMAGE SENSOR			
Type	1/2.3" CCD	1/2.3" CCD	1/2.3" CCD
Effective Pixels	Approx.12.1M	Approx. 10.0M	Approx. 10.0M
Colour Filter Type	Primary Colour	Primary Colour	Primary Colour
IMAGE PROCESSOR			
Type	DIGIC 4 with iSAPS technology	DIGIC III with iSAPS technology	DIGIC 4 with iSAPS technology
LENS			
Focal Length	5.9 – 17.9 mm (35mm equivalent: 33 – 100mm)	6.2 – 18.6 mm (35mm equivalent: 35 – 105mm)	6.2 - 18.6 mm (35mm equivalent: 35 – 105mm)
Zoom	Optical 3x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.5x or 2.0x and Safety Zoom[1])[2] Combined approx. 12x	Optical 3x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.4x or 2.3x and Safety Zoom [1])[2]. Combined approx. 12x	Optical 3x. Digital approx. 4x[2] (with Digital Tele-Converter approx. 1.4x or 2.3x and Safety Zoom[1])[2] Combined approx. 12x
Maximum f/number	f/3.2 – f/5.8	f/2.8 - f/4.9	f/2.8 – f/4.9
Construction	6 elements in 5 groups (1 double sided UA element, 1 single sided UA element)	6 elements in 5 groups (1 double sided aspherical UA element, 1 single sided UA element)	6 elements in 5 groups (1 double sided aspherical UA element and 1 single-sided aspherical UA element)
Image Stabilisation	Yes (shift-type)	Yes (shift-type)	Yes (shift-type)
FOCUSING			
Type	TTL	TTL	TTL
AF System/Points	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre)	AiAF (Face Detection/9-point), 1-point AF (fixed to centre or Face Select and Track)	AiAF (Face Detection / 9-point), 1-point AF (fixed to centre)
AF Modes	Single, Continuous[10], Servo AF[10]	–	Single, Continuous[10]
AF Point Selection	Size (Normal, Small)	Size (Normal, Small)	Size (Normal, Small)
AF Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
AF Assist Beam	YES	YES	YES
Closest Focusing Distance	3cm (W) from front of lens in macro	3cm (W) from front of lens in macro	3cm (W) from front of lens in macro
EXPOSURE CONTROL			
Metering Modes	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)	Evaluative (linked to Face Detection AF frame), Centre-weighted average, Spot (centre)
AE Lock	On/Off Selectable	On/Off Selectable	On/Off Selectable
Exposure Compensation	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction	+/- 2 EV in 1/3 stop increments	+/- 2 EV in 1/3 stop increments. i-Contrast for automatic dynamic range correction
ISO sensitivity[3]	AUTO, 80, 100, 200, 400, 800, 1600	AUTO, High ISO Auto (incorporating Motion Detection Technology), 80, 100, 200, 400, 800, 1600	AUTO, 80, 100, 200, 400, 800, 1600
SHUTTER			
Speed	1 - 1/1500 sec (factory default) 15 - 1/1500 sec (total range - varies by shooting mode)	1/60 - 1/1,500 sec. (factory default) 15 - 1/1,500 sec. (total range - varies by shooting mode)	1 - 1/1500 sec (factory default) 15 - 1/1500 sec (total range - varies by shooting mode)
WHITE BALANCE			
Type	TTL	TTL	TTL
Settings	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom	Auto (including Face Detection WB), Daylight, Cloudy, Tungsten, Fluorescent, Fluorescent H, Custom
VIEWFINDER			
Viewfinder	Real-image zoom, optical viewfinder	Real-image zoom, optical viewfinder	Real-image zoom, optical viewfinder
LCD MONITOR			
Monitor	2.5" PureColor LCD II (TFT), approx. 230,000 dots	2.5" PureColor LCD II (TFT), approx. 230,000 dots	2.5" PureColor LCD II (TFT), approx. 230,000 dots
Coverage	100%	100%	100%
Brightness	Adjustable to one of five levels	Adjustable to one of fifteen levels	Adjustable to one of five levels
FLASH			
Modes	Auto, Manual Flash On / Off	Auto, Manual Flash On/Off	Auto, Manual Flash On / Off
Slow Sync Speed	YES	YES	YES
Red-Eye Reduction	YES	YES	YES
Flash Exposure Compensation	Face Detection FE	Face Detection FE	Face Detection FE
Flash Exposure Lock	YES	YES	YES
Built-in Flash Range	30cm-3.5m (W) / 45cm-2.0m (T)	30cm - 3.5m (W)/2.0m (T)	30cm - 4.2m (W) / 2.4m (T)
External Flash	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1	Canon High Power Flash HF-DC1
SHOOTING			
Modes	Auto*, P, Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Fireworks, Long Shutter, Beach, Underwater, Aquarium, Foliage, Snow, ISO 3200[5], Digital Macro, Color Accent, Color Swap, Stitch Assist, Movie. *with Scene Detection Technology and Motion Detection Technology	Auto, Manual, Digital Macro, Color Accent, Color Swap, Stitch Assist, Movie, Special Scene (Portrait, Night Snapshot, Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater, ISO 3200[5])	Auto*, P, Digital Macro, Portrait, Night Snapshot, Movie, Special Scene (Kids & Pets, Indoor, Sunset, Foliage, Snow, Beach, Fireworks, Aquarium, Underwater, ISO3200[5], Long shutter) *with Scene Detection Technology and Motion Detection Technology
Photo Effects	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Positive Film, Lighter Skin Tone, Darker Skin Tone, Vivid Blue, Vivid Green, Vivid Red, Custom Color)	My Colors (My Colors Off, Vivid, Neutral, Sepia, Black & White, Custom Color (limited))
Drive modes	Single, Continuous, Self-Timer, FaceSelf-Timer	Single, Continuous, Self-Timer	Single, Continuous, Self-Timer, FaceSelf-Timer
Continuous Shooting	Approx. 0.8 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.4 shots/sec.[6] (until memory card becomes full)[7]	Approx. 1.4 shots/sec.[6] (until memory card becomes full)[7]
RECORDING PIXELS/COMPRESSION			
Image Size	(L) 4000 x 3000, (M1) 3264 x 2448, (M2) 2592 x 1944, (M3) 1600 x 1200, (S) 640 x 480, (W) 4000 x 2248. Resize in playback (M3, S, 320 x 240)	(L)3648 x 2736 , (M1)2816 x 2112, (M2)2272 x 1704, (M3, Date Stamp)1600 x 1200, (S)640 x 480, (W)3648 x 2048 . Resize in playback (M3, S, 320 x 240)	(L) 3648 x 2736, (M1) 2816 x 2112, (M2) 2272 x 1704, (M3) 1600 x 1200, (S) 640 x 480, (W) 3648 x 2048. Resize in playback (M3, S, 320 x 240)
Compression	Fine, Normal	Superfine, Fine, Normal	Fine, Normal
Movies	(HD) 1280 x 720, 30fps, (L)640 x 480, 30fps, (M)320 x 240, 30fps	(L)640 x 480, 30 fps/30 fps(LP) , (M)320 x 240, 30 fps (S)160 x 120, 15 fps, (Time Lapse) 640 x 480, 0.5/1 fps (Playback 15 fps)	(L)640 x 480, 30fps/30fps(LP), (M)320 x 240, 30fps
Movie Length	(HD) Up to 4GB or 29 min. 59 sec.[11] (L and M) Up to 4GB or 1 hour[7]	Up to 4GB or 1 hour (L and M)[7] Up to 3 mins (S)[7] Up to 120 mins (Time Lapse)[7]	Up to 4GB or 1 hour (L and M)[7]
FILE TYPES			
Still Image Type	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant)/Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant	JPEG compression, (Exif 2.2 [Exif Print] compliant) / Design rule for Camera File system, Digital Print Order Format [DPOF] Version 1.1 compliant
Movies	MOV [H.264 + Linear PCM (monaural)]	AVI [Motion JPEG compression + WAVE (monaural)]	AVI [Motion JPEG compression + WAVE (monaural)]
Sound Files	-	WAVE (monaural)	-

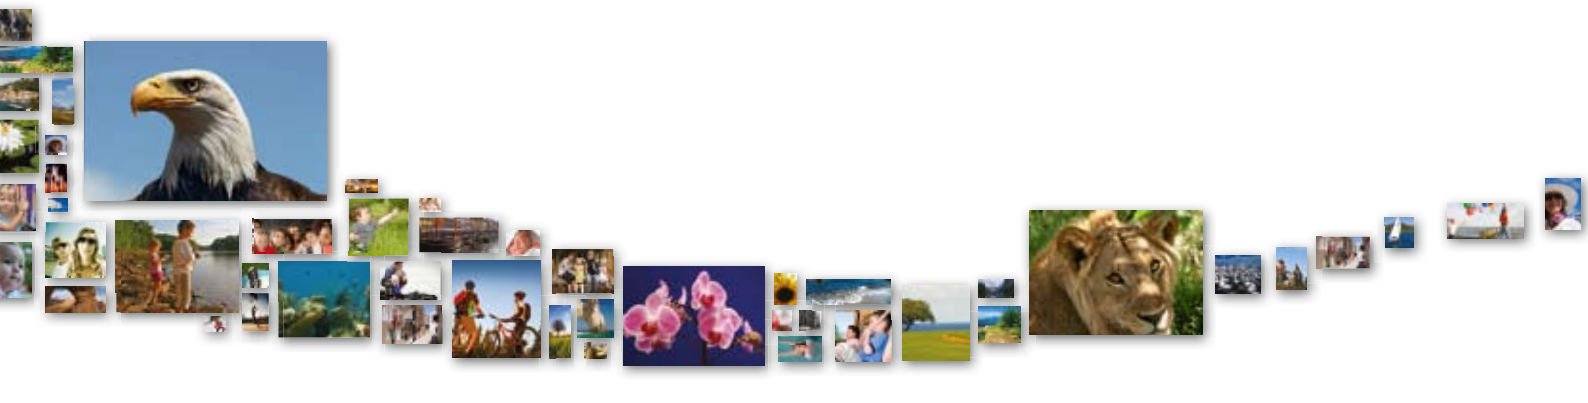

	DIGITAL IXUS 100 IS	DIGITAL IXUS 85 IS	DIGITAL IXUS 95 IS
DIRECT PRINT			
Canon Printers	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)	Canon SELPHY Compact Photo Printers and Canon Inkjet Printers supporting PictBridge (ID Photo Print, Fixed Size Print and Movie Print supported on SELPHY CP & ES printers only)
PictBridge	YES	YES	YES
OTHER FEATURES			
Red-Eye Correction	Yes, during shooting and playback	Yes, during shooting and playback	Yes, during shooting and playback
My Camera/My Menu	Start-up image and camera sounds customisation	Start-up image and camera sounds customisation	-
My Category	Image tagging feature	Image tagging feature	-
Sound Memo	-	Up to 60 sec. per image	-
Intelligent Orientation Sensor	YES	YES	YES
Histogram	YES	YES	YES
Playback zoom	Approx. 2x - 10x	Approx. 2x - 10x	Approx. 2x - 10x
Self-Timer	Approx. 2 or 10 sec., Custom or FaceSelf-Timer	Approx. 2 or 10 sec. or Custom	Approx. 2 or 10 sec. or Custom
Menu Languages	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian	English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Simplified Chinese, Chinese (traditional), Japanese, Russian, Portuguese, Korean, Greek, Polish, Czech, Hungarian, Turkish, Thai, Arabic, Ukrainian, Romanian, Farsi
INTERFACE			
Computer	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)	Hi-Speed USB (MTP, PTP) dedicated connector (Mini-B compatible)
Other	HDMI Mini Connector. A/V output (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)	A/V output, dedicated connector (PAL/NTSC)
MEMORY CARD			
Type	SD, SDHC, MMC, MMCplus, HC MMCplus	SD, SDHC, MMC, MMCplus, HC MMCplus. 32MB memory card supplied	SD, SDHC, MMC, MMCplus, HC MMCplus
SUPPORTED OPERATING SYSTEM			
PC & Macintosh	Windows XP SP2-3 / Vista (including SP1), Mac OS X v10.4 - 10.5	Windows 2000 SP4/XP SP2/Vista, Mac OS X v10.3 - 10.4	Windows XP SP2-3 / Vista (including SP1), Mac OS X v10.4 - 10.5
SOFTWARE			
Browsing & Printing	ZoomBrowser EX / ImageBrowser	ZoomBrowser EX/ImageBrowser	ZoomBrowser EX / ImageBrowser
Other	PhotoStitch	PhotoStitch	PhotoStitch
Drivers	-	TWAIN (2000)	-
POWER SOURCE			
Batteries	Rechargeable Li-ion Battery NB-4L (battery and charger supplied)	Rechargeable Li-ion Battery NB-6L (battery and charger supplied)	Rechargeable Li-ion Battery NB-6L (battery and charger supplied)
Battery life	Approx. 210 shots [8], Approx. 300 min. playback	Approx. 330 shots [8] Approx. 420 min. playback	Approx. 260 shots [8], Approx. 360 min. playback
A/C Power Supply	Optional, AC adapter kit ACK-DC10	Optional, AC adapter kit ACK-DC40	Optional, AC adapter kit ACK-DC40
ACCESSORIES			
Cases/Straps	Soft Leather Case DCC-1200, Digital IXUS Metal or Leather Strap	Soft Leather Case DCC-60, Digital IXUS Metal or Leather Strap	Soft Leather Case DCC-60, Digital IXUS Metal or Leather Strap
Waterproof / Weatherproof Case	Waterproof Case (40m) WP-DC31, Waterproof Case Weight WW-DC1	Waterproof Case (40m) WP-DC23, Waterproof Case Weight WW-DC1	Waterproof Case (40m) WP-DC29, Waterproof Case Weight WW-DC1
Flash	High Power Flash HF-DC1	High Power Flash HF-DC1	High Power Flash HF-DC1
Power Supply & Battery Chargers	AC Adapter Kit ACK-DC10	AC Adapter Kit ACK-DC40	AC Adapter Kit ACK-DC40
Other	Canon HDMI Cable HTC-100		
PHYSICAL SPECIFICATIONS			
Operating Environment	0 - 40 °C, 10 - 90% humidity	0 - 40 °C, 10 - 90% humidity	0 - 40 °C, 10 - 90% humidity
Dimensions (WxHxD)	87.0 x 54.5 x 18.4mm	91.6 x 56.8 x 20.9mm	88.5 x 54.8 x 21.8 mm
Weight (body only)	Approx. 115g	Approx. 155g	Approx. 120g

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Depending on the image size selected.
2 Digital zoom available for still image and standard movie modes only. Optical zoom may not be available during movie recording.
3 Standard Output Sensitivity / Recommended Exposure Index. According to ISO 12232:2006 (20th April 2006) which specifies the method for assigning and reporting ISO speed ratings for digital still cameras.
4 Not all functions of the flash are supported.
5 Recording pixels fixed at 1600 x 1200.
6 Under conditions where the flash does not fire.
7 Depending on memory card speed / capacity / compression setting.
8 Using the batteries and memory card format supplied with the camera, except where indicated.
9 0 - 35 °C when NB-3AH is used
10 Some settings limit availability.
11 The following Speed Class memory cards are required for maximum record time: 1280 x 720, 30fps Speed Class 4 or above. 1920 x 1080, 30fps Speed Class 6

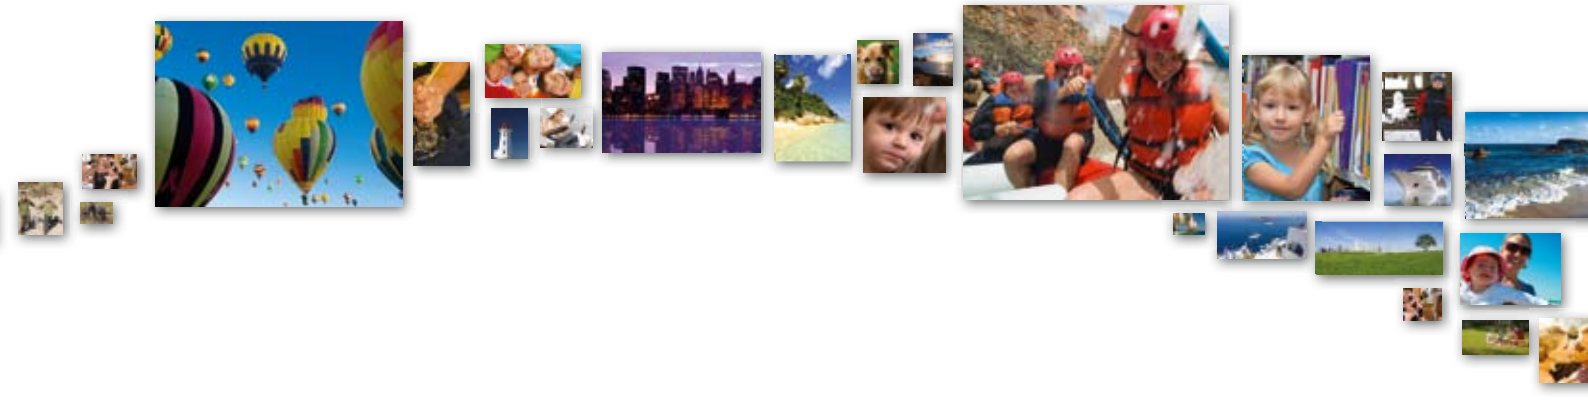

	SELPHY ES3 COMPACT PHOTO PRINTER	SELPHY ES30 COMPACT PHOTO PRINTER	SELPHY CP760 COMPACT PHOTO PRINTER
PRINTING SYSTEM			
Method	D ye-sublimation thermal transfer printing system, with DIGIC II processor	Dye-sublimation thermal transfer printing system, with DIGIC II processor	Dye-sublimation thermal transfer printing system
Maximum Resolution	300 x 600 dpi	300 x 600 dpi	300 x 300 dpi
Colours	3 colour inks with over coating, BW (Black ink with overcoating), Gold/Silver (3 colour inks with over coating and gold/silver), up to 256 levels per colour (24 bit colour depth) [1]	3 colour inks with over coating, BW (Black ink with overcoating), Gold/Silver (3 colour inks with over coating and gold/silver), up to 256 levels per colour (24 bit colour depth) [1]	3 colour inks with over coating, 256 levels per colour (24 bit colour depth)
MEDIA & CARTRIDGE			
Postcard Size	148 x 100mm - [Easy Photo Pack E-P50, Easy Photo Pack E-P100, Easy Photo Pack E-P25BW, Easy Photo Pack E-P20G, Easy Photo Pack E-P20S]	148 x 100mm - [Easy Photo Pack E-P50, Easy Photo Pack E-P100, Easy Photo Pack E-P25BW, Easy Photo Pack E-P20G, Easy Photo Pack E-P20S]	148 x 100mm - [KP-36IP, KP-72IP/IN, KP-108IP/IN]
Wide Size	-	-	100 x 200mm - [KW-24IP] [1]
L Size	119 x 89mm - [Easy Photo Pack E-L50, Easy Photo Pack E-L100]	119 x 89mm - [Easy Photo Pack E-L50, Easy Photo Pack E-L100]	119 x 89mm - [KL-36IP] [1]
Credit Card Size	86 x 54mm - [Easy Photo Pack E-C25]	86 x 54mm - [Easy Photo Pack E-C25]	86 x 54mm - [KC-36IP] [1]
Credit Card Size Stickers	86 x 54mm - [Easy Photo Pack E-C25L]	86 x 54mm - [Easy Photo Pack E-C25L]	86 x 54mm - [KC-18IF] [1]
Mini Stickers	-	-	22.0 x 17.3mm (x8 stickers on one sheet) - [KC-18IL] [1]
Ink Cartridge	Included with media (Ink/ Paper Integrated Cartridge)	Included with media (Ink/ Paper Integrated Cartridge)	Included with media
Image Longevity	100 Years Print [3]	100 Years Print [3]	100 Years Print [6]
MEDIA INPUT			
Sheet Feeder	Auto feed from integrated cartridge	Auto feed from integrated cartridge	Auto feed from paper cassette
PRINT SPEEDS			
Postcard Size	approx. 55 sec [4]	approx. 55 sec [4]	approx. 52 sec [4]
Wide Size	-	-	approx. 65 sec [4]
L Size	approx. 47 sec [4]	approx. 47 sec [4]	approx. 43 sec [4]
Credit Card Size	approx. 33 sec [4]	approx. 33 sec [4]	approx. 25 sec [4]
Credit Card Size Stickers	approx. 33 sec [4]	approx. 33 sec [4]	approx. 25 sec [4]
Mini Stickers	-	-	approx. 25 sec [4]
PRINTING			
Print Modes	All Image Print, Creative Print (Frame, Clip Art, Calendar, Multi Layout, Speech Bubble, ID Photo, Movie Print, Image Effects), DPOF Image Print, Favorites, Reprint, Single Image Print, Trimming Print, 2-up, 4-up, 8-up and Index Layout, Fixed Size Layout [5]	All Image Print, Creative Print (Frame, Clip Art, Calendar, Multi Layout, Speech Bubble, ID Photo, Movie Print, Image Effects), DPOF Image Print, Single Image Print, Trimming Print, 2-up, 4-up, 8-up and Index Layout, Fixed Size Layout [5]	All Image Print, DPOF Image Print, Fixed Size Layout, ID Photo Print, Movie Print, Single Image Print, 2-up, 4-up and 8-up Layout, Index print [2]
Print Settings	Image Optimize, Borderless, Bordered, Date Print, File Name Print, My Colors <10 modes>, Manual adjustment, Red-Eye Correction[5], Download Content (via Memory Card) [6]	Image Optimize, Borderless, Bordered, Date Print, File Name Print, My Colors <10 modes>, Manual adjustment, Red-Eye Correction[5]	Image Optimize, Borderless, Bordered, Date Print, File Name Print, My Colors <5 modes>, Red -Eye Correction[2]
PRINT METHOD			
Direct Printing From a Camera	Canon Direct Print compliant, PictBridge compliant	Canon Direct Print compliant, PictBridge compliant	Canon Direct Print compliant, PictBridge compliant
Direct From a Memory Card	Supported card types: Compact Flash, Microdrive, SD Memory card, miniSD Card, SDHC Memory card, mini SDHC card, Multimedia Card, MMCplus Card, HC MMCplus Card, Memory Stick, Memory Stick PRO, Memory Stick Duo, Memory Stick PRO Duo, microSD Card, microSDHC Card, xD-Picture Card[7], MMCmobile Card[7], MMCmicro Card[7], RS-MMC Card[7], Memory Stick micro [7]	Supported card types: Compact Flash, Microdrive, SD Memory card, miniSD Card, SDHC Memory card, mini SDHC card, Multimedia Card, MMCplus Card, HC MMCplus Card, Memory Stick, Memory Stick PRO, Memory Stick Duo, Memory Stick PRO Duo, microSD Card, microSDHC Card, xD-Picture Card[7], MMCmobile Card[7], MMCmicro Card[7], RS-MMC Card[7], Memory Stick micro [7]	Supported card types: Compact Flash, Memory Stick, Memory Stick PRO, Memory Stick PRO Duo, Memory Stick DUO, Microdrive, miniSD, mini SDHC, MMC, MMCplus, MMCmobile, SD, SDHC, RS-MMC, microSD [5], microSDHC [5], MMCmicro [5], Memory Stick micro [5], xD-Picture Card [5]
Direct From a Camera Phone	Optional Bluetooth Unit BU-30 (printing from compatible mobile camera phones & PDA's) [8], IrDA IR, IrSimple (printing from compatible mobile camera phones) [9]	Optional Bluetooth Unit BU-30 (printing from compatible mobile camera phones & PDA's) [8]	Optional Bluetooth Unit BU-30 (printing from some mobile camera phones & PDA's) [7]
Direct From Internal Memory	Total storage capacity (for reprint function, print frames & storing images): 1 GB	-	-
Print From a Computer	Yes, requires standard USB cable	Yes, requires standard USB cable	Yes, requires standard USB cable
INTERFACE			
Camera	USB type A port on printer, WiFi IEEE 802.11b (with Digital IXUS WIRELESS and Wireless Print Adapter WA-1E)	USB type A port on printer, WiFi IEEE 802.11b (with Digital IXUS WIRELESS and Wireless Print Adapter WA-1E)	USB type A port on printer, WiFi IEEE 802.11b (with Digital IXUS WIRELESS and Wireless Print Adapter WA-1E)
Computer	USB type B port on printer	USB type B port on printer	USB type B port on printer
LCD Monitor	3.5" Colour TFT viewer with multi-language user interface [10]	3.0" Colour TFT viewer with multi-language user interface [10]	2.5" Colour TFT viewer with multi-language user interface [9]
SUPPORTED OPERATING SYSTEM			
PC	Windows XP SP2 / Vista (Incl. SP1)	Windows XP SP2 / Vista (Incl. SP1)	Windows 2000 SP4 / XP (SP2) / Vista
Macintosh	Mac OS X v10.4 - v10.5	Mac OS X v10.4 - v10.5	Mac OS X v10.3 - v10.4
SOFTWARE			
Browsing & Printing	PC: ZoomBrowser EX, Photo Express LE Mac: ImageBrowser	PC: ZoomBrowser EX, Photo Express LE Mac: ImageBrowser	PC: ZoomBrowser EX, Photo Express LE Mac: ImageBrowser
Other	SELPHY Contents Utility	-	
Drivers	PC / Mac	PC / Mac	PC / Mac

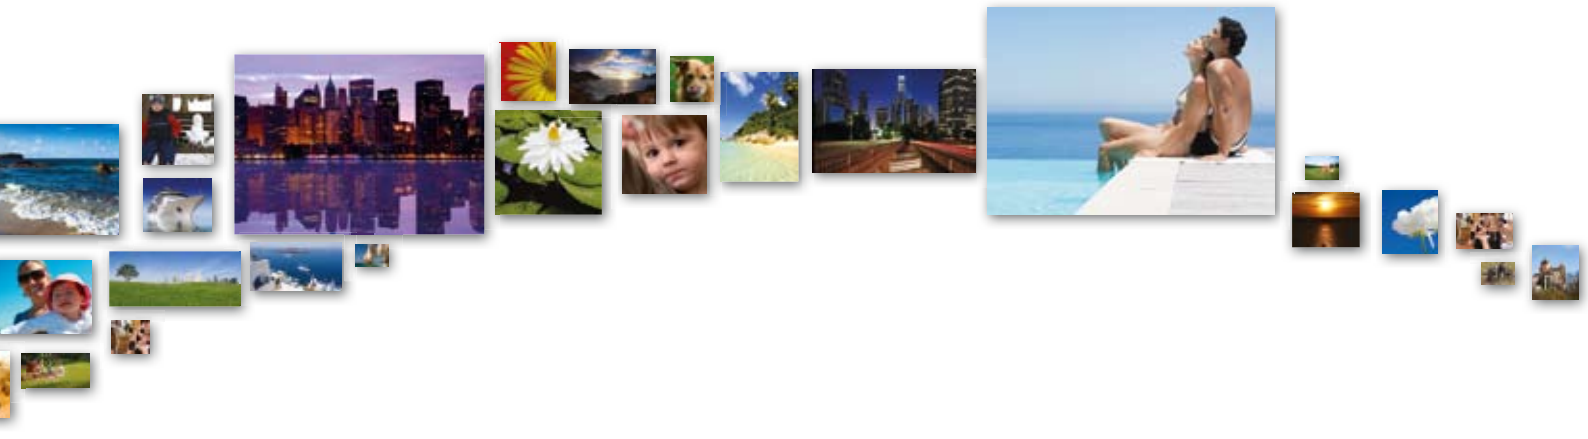

	SELPHY ES3 COMPACT PHOTO PRINTER	SELPHY ES30 COMPACT PHOTO PRINTER	SELPHY CP760 COMPACT PHOTO PRINTER
POWER SOURCE			
AC Power Supply	Yes, built-in	Yes, built-in	Yes, supplied
Battery Pack	–	–	–
Power Consumption	Approx. 4W (standby), approx. 70W (printing)	Approx. 4W (standby), approx. 70W (printing)	Approx. 4W (standby), approx. 60W (printing)
ACCESSORIES			
Power Supply & Battery Chargers	Built-in AC adapter	Built-in AC adapter	CA-CP200W Power adapter
Case	–	–	CP Printer Carrying Case DCC-CP1
Paper Cassette	–	–	Postcard Size paper cassette [PCP-CP300], Wide paper cassette [PCW-CP100], L size paper cassette [PCL-CP300], Card Size [PCC-CP300] CP Printer Carrying Case DCC-CP2
Other	BU-30 Bluetooth Unit for printing from compatible camera phones and PDA's [8]	BU-30 Bluetooth Unit for printing from compatible camera phones and PDA's [8]	BU-30 Bluetooth Unit for printing from compatible camera phones and PDA's [7]
PHYSICAL SPECIFICATIONS			
Operating Environment	5 – 40 °C, 20 – 80% humidity	5 – 40 °C, 20 – 80% humidity	5 – 40 °C, 20 – 80% humidity
Dimensions	225.0 x 226.3 x 138.0mm	225.0 x 226.3 x 138.0mm	180 x 126.7 x 73.1mm (printer only without protrusions)
Weight	2090g (Excluding Ink/ Paper Integrated Cartridge)	2075g (Excluding Ink/ Paper Integrated Cartridge)	900g (Excluding Ink/ Paper Integrated Cartridge)

SELPHY ES3 COMPACT PHOTO PRINTER SELPHY ES30 COMPACT PHOTO PRINTER

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Gold/Silver printing available via PC or in selected modes only
2 Requires optional paper cassette
3 To test the image permanence of prints that are stored in an album, we use an accelerated testing method as how the image permanence of silver-halide photo papers are measured when stored in dark places. Print samples are printed with the optical density of 1.0 (each Bk, C, M,Y). The samples are kept in a certain environment of high temperature and 50% humidity. The rate of the decrease in the optical density and rate of yellow discoloration are recorded. The recorded results are then converted to the length of time when print image is kept in an environment of 23°C/ 50%humidity. <Criteria for estimation of print longevity> 'The point where monochromatic/ reflective optical density shows loss of 30% (starting density of 1.0).
4 Print speed can vary dependent on data size, print method, memory card and capacity and is measured from start of printing excluding paper handling
5 Modes/features available may differ dependent on camera model or use of memory card to print
6 Content is transferred to the internal printer memory via memory card, using SELPHY Contents Utility.
7 Requires adapter (sold separately)
8 Mobile phones and PDA's must be Bluetooth enabled and support Bluetooth version 1.1 or above Photo printing only - pictures must be in the JPEG format. Bluetooth operation depends on the device and software version used
9 Pictures must be taken in the JPEG format and transferred using the IrOBEX or IrMc by vNOTE protocol
10 Supported languages are: English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Russian, Portuguese, Hungarian, Polish, Czech, Greek, Turkish, Simplified Chinese, Chinese, Korean, Japanese (Also supported on ES2, ES20, ES3 and ES30: Ukrainian, Romanian, Thai)

SELPHY CP760 COMPACT PHOTO PRINTER

All data is based on Canon standard testing methods (according to CIPA Standards) except where indicated.
Subject to change without notice.

1 Requires optional paper cassette
2 Modes/features available may differ dependent on camera model or use of memory card to print
3 Pictures must be taken in the JPEG format and transferred using the IrOBEX or IrMc by vNOTE protocol
4 Print speed can vary dependent on data size, print method, memory card and capacity and is measured from start of printing excluding paper handling
5 Requires adapter (sold separately)
6 To test the image permanence of prints that are stored in an album, we use an accelerated testing method as how the image permanence of silver-halide photo papers are measured when stored in dark places. Print samples are printed with the optical density of 1.0 (each Bk, C, M,Y). The samples are kept in a certain environment of high temperature and 50% humidity. The rate of the decrease in the optical density and rate of yellow discoloration are recorded. The recorded results are then converted to the length of time when print image is kept in an environment of 23°C/ 50% humidity. <Criteria for estimation of print longevity> 'The point where monochromatic/ reflective optical density shows loss of 30% (starting density of 1.0)
7 Mobile phones and PDA's must be Bluetooth enabled and support Bluetooth version 1.1 or above Photo printing only - pictures must be in the JPEG format. Bluetooth operation depends on the device and software version used
8 Supported languages are: English, German, French, Dutch, Danish, Finnish, Italian, Norwegian, Swedish, Spanish, Russian, Portuguese, Hungarian, Polish, Czech, Greek, Turkish, Simplified Chinese, Chinese, Korean, Japanese (Also supported on ES2, ES20, ES3 and ES30: Ukrainian, Romanian, Thai)
9 Supported languages are: English, German, French, Italian, Spanish, Japanese, Simplified Chinese
10 Content is transferred to the internal printer memory via memory card, using SELPHY Contents Utility

you can

Canon

Canon Ireland
www.canon.ie

Canon UK Ltd.
www.canon.co.uk

Canon Inc
www.canon.com

Canon Europa NV
www.canon-europe.com

© 1986 Panda symbol WWF ® WWF Registered Trademark

English Edition 0131W881

© Canon Europa NV 2009